


Imase

2871



Attorney Docket No. 09793822-0157

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In Patent Application of:

Seiji Sato

Application No. 10/009,112

Filed: December 7, 2001

For: LIQUID CRYSTAL DISPLAY APPARATUS,  
LIQUID CRYSTAL DEVICE AND LIQUID  
CRYSTAL DISPLAY SYSTEM

) Group Art Unit: 2871

) Examiner: T. Rashid Chowdhury

) I hereby certify that this document is being  
) deposited with the United States Postal Service as  
) first class mail in an envelope addressed to:  
) Commissioner for Patents, P.O. Box 1450,  
) Alexandria, VA 22313-1450 on November 13,  
) 2003.

) *Antonieta Musto*  
) Antonieta Musto

Commissioner for Patents  
Washington, D.C. 20231

**SUBMISSION OF  
CERTIFIED ENGLISH TRANSLATION OF PRIORITY DOCUMENT**

Dear Sir:

To perfect Applicant's claim to priority in the response to the April 18, 2003 Office Action for the above-identified application, Applicant herewith submits the certified English translation of Japanese Patent Application No. 2000-113270, filed April 10, 2000.

The Commissioner is authorized to charge any fees which may be due or credit any overpayments to Deposit Account No. 19-3140. A duplicate copy of this sheet is enclosed for that purpose.

Respectfully submitted,

Dated: November 13, 2003

By:

*Thomas J. Burton*

Thomas J. Burton

Registration No. 47,464


SONNENSCHN NATH & ROSENTHAL LLP

P.O. Box 061080

Wacker Drive Station, Sears Tower

Chicago, Illinois 60606-1080

(312) 876-8000



IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

APPLICANT : Seiji Sato et al.

APPLICATION No. : 10/009,112

FILING DATE : December 7, 2001

Group Art Unit :2871

Examiner : Chowdhury, Tarifur Rashid

TITLE : Liquid Crystal Display Apparatus, Liquid Crystal Device and Liquid Crystal Display System

Hon. Commissioner of Patents and Trademarks,  
Washington, D.C. 20231

SIR:

CERTIFIED TRANSLATION

I, Michiyo Funakoshi, am an official translator of the Japanese language into the English language and I hereby certify that the attached comprises an accurate translation into English of Japanese Application No. 2000-113270, filed on April 10, 2000.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

November 7, 2003

Date

Michiyo Funakoshi

Michiyo Funakoshi

**Patent Office**  
**Japanese Government**

This is to certify that the annexed is a true copy of the following application as  
filed with this Office.

**Date of Application :**        **April 10, 2000**

**Application Number:**        **Patent Application**  
   **Ser. No. 2000-113270**

**Applicant:**                    **Sony Corporation**

**March 9, 2001**

**Commissioner,**  
**Patent Office Kozo Oikawa**

[Document Name]	Patent Application
[Reference Number]	9900359602
[Filing Date]	April 10, 2000
[To]	Hon.Commissioner, Patent Office
[IPC]	G09F 9/30
[Inventor]	
[Address]	c/o Sony Corporation 7-35, Kitashinagawa 6-chome, Shinagawa-ku, Tokyo, Japan
[Name]	Seiji Sato
[Inventor]	
[Address]	c/o Sony Corporation 7-35, Kitashinagawa 6-chome, Shinagawa-ku, Tokyo, Japan
[Name]	Hidehiko Ogasawara
[Patent Applicant]	
[Identification Number]	000002185
[Name]	Sony Corporation
[Representative]	Nobuyuki Idei
[Patent Attorney]	
[Identification Number]	100067736
[Patent Attorney]	
[Name]	Akira Koike
[Patent Attorney]	
[Identification Number]	100086335
[Patent Attorney]	
[Name]	Eiichi Tamura

[Patent Attorney]

[Identification Number] 100096677

[Patent Attorney]

[Name] Seiji Iga

[Indication of Charge]

[Number of Prepaid Ledger] 019530

[Amount] 21,000 yen

[List of Document]

[Document] Specification 1

[Document] Drawing 1

[Document] Summary 1

[General Power of Attorney Number] 9707387

[Need of Proof] Yes



Name of Document]

## SPECIFICATION

[Title of the Invention]

Liquid Crystal Display Apparatus and Liquid Crystal Display Device

[Claims]

[Claim 1]

A liquid crystal display apparatus comprising:

a liquid crystal display device having a liquid crystal panel, a first polarizing filter, arranged on the front surface of said liquid crystal panel and a second polarizing filter arranged on the back side of said liquid crystal panel, said liquid crystal panel including a pair of transparent electrode plates and liquid crystals sealed therein;

a first light source arranged on the back side of said liquid crystal display device, said first light source having a polarizing filter unit for the right eye and a polarizing filter unit for the left eye, said polarizing filter unit for the right eye and a polarizing filter unit for the left eye having respective different directions of polarization and being fixedly mounted on left and right portions on a front surface thereof;

optical means arranged on the back side of said liquid crystal display device for collecting the illuminating light from said light source for illuminating the so-collected light on said liquid crystal display device;

a second light source arranged on the front side of said liquid crystal display device for illuminating the light on the head of a viewer;

light receiving devices arranged on the front sides of said polarizing filter unit for the right eye and the polarizing filter unit for the left eye at a preset spacing therefrom; and

position control means for processing and comparing the volumes of the received light in said light receiving devices to control the position of said first light source in the left-and-right direction; wherein

the image information for the right eye and that for the left eye are alternately displayed on said liquid crystal panel every horizontal line in agreement with light transmitting lines in said first and second polarizing filters; the light illuminated from said polarizing filter unit for the right eye is incident on the right eye of the user through said liquid crystal display device, the light illuminated from said polarizing filter unit for the left eye is incident on the left eye of the user through said liquid crystal display device, independently of the light from said first light source through said polarizing filter unit for the right eye; the volume of light illuminated from said second light source and reflected by the head of the user is sensed by said light receiving devices to detect the movement in the left-and-right direction of the head of the viewer; causing automatic movement of the position of the first light source in the left-and-right direction in agreement with the detected movement.

[Claim 2]

The liquid crystal display apparatus according to claim 1 wherein said first and second polarizing filters each include two linear polarizing filter lines, perpendicular

to each other, every horizontal line of said liquid crystal panel, and wherein the facing linear polarizing filter lines of said first and second polarizing filters are formed in polarizing directions perpendicular to each other.

[Claim 3]

The liquid crystal display apparatus according to claim 1 wherein said first and second polarizing filters are linear filters having the same polarizing directions over the entire surfaces thereof but being perpendicular to each other, and wherein half wave plates are provided every other horizontal line of the liquid crystal panel in said second linear polarizing filter.

[Claim 4]

The liquid crystal display apparatus according to claim 1 wherein said second polarizing filter includes mutually perpendicular linear polarizing filter lines alternately arranged every horizontal line of said liquid crystal panel;

said first polarizing filter being formed by a linear polarizing filter of the same direction as the direction of one of said linear polarizing filter unit of said second polarizing filter; and wherein

the driving states of said liquid crystal panel for one horizontal lines having the same direction of polarization of said first and second polarizing filters are set reversely.

[Claim 5]

The liquid crystal display apparatus according to claim 1 wherein, in said



position control means, the polarizing filter unit for the right eye and the polarizing filter unit for the left eye are arranged as a plural number of strip-shaped Brewster angle variable type polarizing devices to vary the boundary positions of the mutually perpendicular Brewster angles.

[Claim 6]

The liquid crystal display apparatus according to claim 1 wherein, in said position control means includes a motor for causing movement of said first light source.

[Claim 7]

A liquid crystal display device comprising:

first image separating means; and

second image separating means which is clamped by two substrates and arranged next to pixels.

[Claim 8]

The liquid crystal display device according to claim 7 wherein said second image separating means are independent from one horizontal line to another.

[Claim 9]

The liquid crystal display device according to claim 7 wherein said first and second image separating means are linear filters having the same polarizing directions over the entire surfaces thereof but being perpendicular to each other, and wherein half wave plates are provided every other horizontal line in said second

polarizing filter.

[Claim 10]

The liquid crystal display device according to claim 7 wherein said second image separating means includes mutually perpendicular linear polarizing filter lines alternately arranged every horizontal line of said light modulating means;

said first image separating means being formed by a linear polarizing filter of the same direction as the direction of one of said linear polarizing filter lines of said second image separating means; and wherein

the driving states of said pixels for one horizontal lines having the same direction of polarization of said first and second image separating means are set reversely.

[Claim 11]

The liquid crystal display device according to claim 10 wherein said second image separating means includes an orientation layer and a layer containing a polarizing device, said polarizer containing layer being deposited on said layer.

[Claim 12]

The liquid crystal display device according to claim 11 wherein said polarizing device is dichromic molecules.

[Claim 13]

The liquid crystal display device according to claim 12 wherein said dichromic molecules are density transition type liquid crystals.

[Claim 14]

The liquid crystal display device according to claim 7 wherein said second image separating means is constructed by alternately arranging layers with a circular polarization separating device having respective different twist directions from one horizontal line to another, with a quarter wave plate being arranged on the front side of said layer;

said first image separating means is formed by a linear polarizing filter having the same direction as the direction of one linear polarized light passed through said second image separating means; and wherein

the driving state of said pixels are reversely set for horizontal lines for which the direction of polarization of linear light transmitted through said second image separating means is coincident with the first image separating means.

[Claim 15]

The liquid crystal display device according to claim 14 wherein circular polarized light separating device is cholesteric liquid crystals.

[Detailed description of the invention]

[0001]

[Technical field of the invention]

This invention relates to a liquid crystal display apparatus with which a recorded picture having the stereoscopic information may be viewed as a three-dimensional picture, or a so-called stereo image, using a liquid crystal display,

without employing special glasses.

[0002]

[Prior Art]

Up to now, various techniques of representing an image three-dimensionally were developed, and the representing methods for three-dimensional images were researched and put to use in many fields, such as photography, cinema or television. The methods for demonstrating a three-dimensional image may be classified into a method employing glasses and a method not employing them.

[0003]

Typical of the system employing glasses are an anaglyphic system in which a viewer wears so-called red glasses or blue glasses, and a system in which a viewer wears polarizing glasses. With these systems, an image presenting parallax is input to left and right eyes of a user whereby the viewer may see the image as a stereo image. With these systems, however, the viewer needs to wear glasses, and they feel cumbersome.

[0004]

On the other hand, a 3D (three-dimensional) display apparatus of the lenticular system or the parallax barrier system is already in the stage of practical application. There is an advantage that a user does not have to employ glasses in these systems. However, an area that permits stereo vision is extremely narrow in the transverse direction and is  $\pm$ several cm, so that limitations are perpetually imposed on user head

positions. Accordingly, the user might feel more uncomfortable than those who employ glasses.

[0005]

So, such a back light splitting system, disclosed in the Japanese Laying-Open Patent Publication H-10-63199, has been proposed as a liquid crystal apparatus in which the stereo image is not impaired even if the user viewing position is slightly offset in the left and right directions with respect to a liquid crystal display screen, and in which the stereo image can be appreciated as the horizontal resolution proper to the liquid crystal display device is maintained.

[0006]

The back light splitting system is hereinafter explained. A back light of a routine liquid crystal device is arranged at back of the liquid crystal panel with planar illumination, having an equivalent area to the panel area, in intimate contact with the liquid crystal panel, so that non-directive light is incident on the user's left and right eyes. In the back light splitting system, as contrasted to that, two back lights, having an appreciably smaller area than a liquid crystal panel, are separately arranged for left and right eyes at the positions spaced apart from the liquid crystal panel a distance slightly larger than the focal length of a convex lens, having a diameter approximately equal to that of the display screen, to take advantage of the directivity of the convex lens.

[0007]

Fig.23 shows a display apparatus of a point light source system disclosed in Patent No.2679176. A light beam illuminated from a point light source 41 to traverse a convex lens 42 is refracted by the convex lens 42 and converged at a point corresponding to a light converging point 43. If an eye is at the site of the light converging point, the convex lens 42 in its entirety shines brightly so as to serve as a back light for a display screen 44 placed in a near-by position.

[0008]

Fig.24 is a plan view for a case where the point light source is replaced by a light source for a right eye. In such case, the light beam acts as if it is of the same component as the light beam emitted from the point light source 41 and lights the entire surface of the convex lens 42 to then fall on a right eye 46. Similarly, the spatial light source by the light source causes a light source image area to be presented backward of the lens. As long as the viewer's eye is at this area, the convex lens 42 is lighted brightly uniformly so as to serve as a back light for the display screen 44 placed thereat. If this is applied to left and right eyes, the light source image areas, optimized for each eyes, that is a light source image area for a right eye 48 and a light source image area for a left eye 49, by two light sources arranged with a center axis of the convex lens 42 as the boundary, that is a by surface light source 45 for the right eye and by a surface light source 47 for the left eye, are formed, as shown in Fig.25.

[0009]

Figs.26 and 27 schematically show the state in which the light emitted from back lights, is sorted by a line-based polarization filter 52 to fall on the right and left eyes. In this case, the surface light source 47 for the left eye having a leftward descending Brewster angle is first directed to the left eye 50 due to the directivity of a Fresnel lens 51. Then, only the image information for the left eye of an even line 54, having a coincident Brewster angle, falls on the left eye 50 by the line-based polarization filter 52. The image information for the right eye also falls on the right eye 46 going through the same process from the surface light source 45 for the right eye. The left and right parallax information, represented on the even line 54 and the odd line 53 of liquid crystal screen, fall on lying before the liquid crystal screen to become fused in the user's brain so as to be perceived as a stereo image.

[0010]

[Problems to be Solved by the Invention]

In this case, however, there is presented a problem that, since the left and right parallax information are split at a center of the screen, the same image is incident on both eyes if a viewer moves his or her head in the left and right, so that the both eyes enter one area, with the result that the image becomes a two-dimensional image to render the stereo vision impossible. On the other hand, if a 3D display apparatus is formed by polarizing filters 55, 56, glass substrates 57, 58, a half-wave plate 59, a color filter 60, a display screen 61, a protective film 62 and a transparent electrode 63, that is in a system in which the polarizing filter is formed on the glass plate on the

light incident side of the surface light source, the image information on a line which inherently should not be visible is superposed as crosstalk on the inherent image information if the line of sight of the viewer is in the direction indicated by a dotted line arrow in Fig.28, thus producing a stereo image extremely difficult to view. It should be noted that, since the vertical pitch of a 10.4-inch SVGA (600 by 800 pixels) is 0.264 mm, the light beam traversing a polarizing filter on a glass plate 1mm in thickness, if deviated  $\pm 15$  degrees, becomes wholly the illumination for the adjacent line, so that a stereo image having the convex and concave relation inverted is viewed. Even if the angle of offsetting is less than  $\pm 15$  degrees, the degree of freedom in the vertical direction is well-nigh lost due to crosstalk. Thus, in the absence of the compensation for the difference in the seated height or in the elevation angle of the display surface, more constraint than that experienced in the left and right direction is imposed.

[0011]

For coping with this inconvenience, a variety of techniques have been proposed which detect the head position of the viewer to control an area allowing for stereo vision in accordance with detected results. For example, as methods for detecting the viewer's head position, there are known such a method consisting in loading a magnetic sensor on the head and such a method consisting in using a video camera to detect the head image. However, with these methods, the viewer may feel that a foreign object set on his or her head is cumbersome and the cost of the product



is raised. So, there has as yet not been introduced a handy, without wearing glasses, 3D liquid crystal display apparatus in which the viewer is able to enjoy an optimum stereo image when he or she simply sits before a display surface, even though he or she moves his or her head slightly in the vertical and/or left and right directions.

[0012]

In view of the above-described conventional status of the art, it is an object of the present invention to provide a liquid crystal display apparatus and liquid crystal display device in which a stereo image is not impaired and hence a high precision stereo image can be enjoyed even if the viewing position of the viewer is deviated slightly in the vertical and/or left and right directions with respect to the liquid crystal display surface.

[0013]

[Means to Solve the Problem]

The present invention provides a liquid crystal display apparatus including a liquid crystal panel, a first polarizing filter arranged on the front surface of the liquid crystal panel and a second polarizing filter arranged on the back side of the liquid crystal panel, the light modulating means including a pair of transparent electrode plates and liquid crystals sealed therein, a first light source arranged on the back side of the liquid crystal display device, the first light source having a polarizing filter unit for the right eye and a polarizing filter unit for the left eye, the polarizing filter unit for the right eye and a polarizing filter unit for the left eye having respective different

directions of polarization and being fixedly mounted on left and right portions on a front surface thereof, optical means arranged on the back side of the liquid crystal display device for collecting the illuminating light from the light source for illuminating the so-collected light on the liquid crystal display device, a second light source arranged on the front side of the liquid crystal display device for illuminating the light on the head of a viewer, light receiving devices arranged on the front sides of the polarizing filter unit for the right eye and the polarizing filter unit for the left eye at a preset spacing therefrom, and position control means for processing and comparing the volumes of the received light in the light receiving devices to control the position of the first light source in the left-and-right direction, and the image information for the right eye and that for the left eye are alternately displayed on the liquid crystal panel every horizontal line in agreement with light transmitting lines in the first and second polarizing filters, the light illuminated from the first light source through the polarizing filter unit for the right eye is incident on the right eye of the user through the liquid crystal display device, the light illuminated from the first light source through the polarizing filter unit for the left eye is incident on the left eye of the user through the liquid crystal display device, independently of the light from the first light source through the polarizing filter unit for the right eye. The volume of light illuminated from the second light source and reflected by the head of the user is sensed by the light receiving devices to detect the movement in the left-and-right direction of the head of the viewer. The position control means causes automatic

movement of the position of the first light source in the left-and-right direction in agreement with the detected movement.

[0014]

That is, in the liquid crystal display apparatus, according to the present invention, the light from the polarizing filter for the right eye is transmitted only through every other line on which an image for the right eye is projected to fall on the right eye of the viewer, whilst the light from the polarizing filter for the left eye is transmitted only through every other line on which an image for the left eye is projected to fall on the left eye of the viewer, so that a stereo image may be viewed due to three-dimensional perception derived from the parallax between the two eyes. So, a regular stereo image may be viewed within the ranges of the stereo vision areas of the left and right eyes.

[0015]

The light illuminated from the second light source and reflected by the viewer's head is perceived by the light receiving device to sense the movement in the left-and-right direction of the viewer's head to cause the first light source position to be automatically shifted in the left-and-right direction in keeping with the movements of the viewer's head.

[0016]

Since the light receiving device is fixedly mounted on the first light source, the light receiving device is moved with movement of the first light source. The

movement of the first light source ceases when the light receiving device gets to the preset position. Thus, even if the viewer's head is moved in the left-and-right direction, the viewer head position is automatically tracked to cause the stereo vision area to be moved to a proper position for appreciating the stereo vision image.

[0017]

On every other horizontal line of the liquid crystal panel, the image for the right eye and that for the left eye are projected. So, the totality of the images for the right and left eyes are directly incident selectively on the right and left eyes of the viewer, thus not detracting from the horizontal resolution.

[0018]

The present invention provides a liquid crystal display device including first image separating means, and second image separating means which is clamped by two substrates and arranged next to pixels.

[0019]

That is, in the liquid crystal display device according to the present invention, in which the second image separating means is arranged next to the pixels, the distance between the pixels and the image separating means becomes shorter. The result is that the image information on a line which inherently should not be visible due to the distance between the pixels and the image separating means may be prevented from entering the eye as cross-talk in superimposition on the inherent image information.

[0020]

[Best Mode for Carrying out the Invention]

Referring to the drawings, preferred embodiments of the present invention will be explained in detail. The present invention is not limited to the embodiments, now explained, but may be modified without departing from its scope.

[0021]

First Embodiment

Fig.1 is a schematic plan view showing a liquid crystal display apparatus embodying the present invention.

[0022]

First, the structure of the liquid crystal display apparatus is explained. On the back surface of a liquid crystal display device 1, a Fresnel lens 2 formed of a convex lens, as optical means, is arranged at a preset distance therefrom.

[0023]

On the back side of the Fresnel lens 2, there is mounted, at a preset distance from a Fresnel lens 2, a back light 3, as a light source for illuminating the liquid crystal display device 1 from its back side. On the front side of this back light 3, that is, on its irradiated side, there are fixedly mounted a polarizing filter unit for a right eye 4 and a polarizing filter unit for a left eye 5 on, which are arranged with the center of the back light 3 as a boundary. The polarizing filter unit for a right eye 4 and the polarizing filter unit for a left eye 5 are arranged as linear polarizing filters,

having the directions of polarization extending at right angles to each other. Here, the linear polarizing filters are formed of a rightward ascending plane of polarization a leftward ascending plane of polarization.

[0024]

On the front sides, that is the light irradiated sides, of the polarizing filter unit for a right eye 4 and the polarizing filter unit for a left eye 5, there are arranged left and right light receiving devices 6, 6 at approximately equal distances from the boundary between the polarizing filter unit for a right eye 4 and the polarizing filter unit for a left eye 5 for receiving the reflected light from an infrared LED as a head followup light source. To receiving devices 6 is connected a back light position controller not shown in Figs. The back light position controller, as shown in Fig.2, is made up of a preamplifier 7, an amplifier 8, a differential amplifier 9 and a forward/reverse inverting driving circuit 10. To this forward/reverse inverting driving circuit 10 is connected back light movement means, such as a motor 11. In the back light position controller, the volumes of reflected light received by the left and right light receiving devices 6 are amplified and input to a differential amplifier 9, which then compares the volumes of the input light to the left and right light receiving devices 6 to output a difference there between as data to the forward/reverse inverting driving circuit 10. Based on this data, the forward/reverse inverting driving circuit 10 issues a command of shifting the position of the back light to back light position shifting means.

[0025]

On the front surface of the liquid crystal display device 1, there is mounted e.g., an infrared LED 12, as a head position followup light source, at a preset distance from the liquid crystal display device. The infrared LED 12 illuminates the head position followup infrared light to a viewer 13.

[0026]

The liquid crystal display device 1 is of the light transmitting type and, as shown in Fig.3, includes a liquid crystal panel 14, as later explained, a first polarization filter 15 arranged on the front surface of the liquid crystal panel 14, that is towards the viewer 13, and a second polarization filter 16, arranged on the back side of the liquid crystal panel 14, that is towards the back light 3. The liquid crystal panel 14 includes liquid crystals twisted  $90^\circ$  in a pair of orientation films. If no voltage is applied across a pair of the orientation films, the incident light is radiated as it is rotated through  $90^\circ$  and, if voltage is applied across a pair of the orientation films, the incident light is directly radiated, without rotating the incident light. The first and second polarizing filters 15, 16 are constructed and arranged so that rightward ascending linear polarizing filter line and leftward ascending linear polarizing filter line, extending at right angles to each other, are arranged alternately every horizontal line of the liquid crystal panel 14, and so that the polarization directions of the rightward ascending linear polarizing filter 15 and the leftward ascending polarizing filter lines of the first and second polarizing filters 15, 16 extend

at right angles. So, the light emitted by the back light 3 and which has traversed the polarizing filter unit for a right eye 4 and the polarizing filter unit for a left eye 5 are incident only at the rightward ascending linear polarizing filter line and at the leftward ascending linear polarizing filter line of the same polarization plane, the light is incident every other horizontal line, with the incident light being transmitted or interrupted when voltage is not applied to or applied to the liquid crystal panel 14, respectively.

[0027]

The liquid crystal panel 14 of the liquid crystal display device 1 is constructed and designed so that the image information for right eye and that for left eye are demonstrated alternatively in agreement with the light transmitting lines of the two polarizing filters 15, 16.

[0028]

The operation of the above-described configuration is hereinafter explained. The light emitted by the back light 3 and transmitted through the polarizing filter unit for a right eye 4 traverses the Fresnel lens 2 and, when it gets to the liquid crystal display device 1, it is incident only at the rightward ascending linear polarizing filter line, every other horizontal line, having the same polarization plane as that of the polarizing filter unit for a right eye 4. The light incident every other horizontal line is radiated depending on the driving state of the liquid crystal panel 14, with the radiated light being illuminated only in the right eye zone of the viewer 13. The light



emitted by the back light 3 and transmitted through the polarizing filter unit for a left eye 5 gets only to the liquid crystal display device 1 in the same way as above described to fall only at the leftward ascending linear polarizing filter line, every other horizontal line, having the same polarization plane as the polarizing filter unit for a left eye 5. The light thus incident every other horizontal line, although the line is a different line from said line, is radiated depending on the driving state of the liquid crystal panel, with the radiated light being illuminated only in the left eye zone for the viewer.

[0029]

In the liquid crystal panel 14, an image for the right eye and that for the left eye are displayed every other horizontal line in keeping with the light transmitting lines of the first and second polarizing filters 15, 16, so that, if the viewer 13 views the liquid crystal display device 1 in the stereo vision area, only the image for the right eye is incident on the right eye, whilst only the image for the left eye is incident on the left eye, respectively independently of each other. Thus, the viewer may see the image as a stereo image by three-dimensional perception derived from the parallax.

[0030]

The stereo vision area is now explained. Referring to Fig.4, the light source surface of the back light 3 for a right eye, forms a real image 17, by the Fresnel lens 2, as an image of the light source. In effect, the light source area as a space is present as a light source area. If the right eye is positioned in this area, the entire area of the

Fresnel lens 2 is illuminated homogeneously. For the back light 3 for a left eye is arranged, a similar light source area and a light source area as a space are present, so that, on the whole, a stereo vision area 18 shown in Fig.4 is formed. As may be seen from Fig.4, an area which permits proper light incidence on the left and right eyes is limited, so that, if the left and right eyes are off from the respective stereo vision areas 18, the balance in the parallax is disturbed so that the image cannot be seen as a stereo image based on the three-dimensional perception. So, according to the present invention, if the angle in the directions with which the viewer sees the liquid crystal display surface, that is if the eye of the viewer is off from the stereo vision areas 18, the relative position between the viewer 13 and the back light 3 with the liquid crystal display device 1 in-between is automatically adjusted, by way of correcting the angle of field of view, to assure automatic simplified correction of the stereo vision areas 18 to high accuracy.

[0031]

The automatic correction of the relative position between the viewer 13 and the back light 3, with the interposition of the liquid crystal display device 1, is hereinafter explained. According to the present invention, an infrared LED 12, for example, is used as a light source for sensing the relative position between the viewer 13 and the back light 3, with the interposition of the liquid crystal display device 1. The infrared LED 12 is arranged between the liquid crystal display device 1 and the viewer 13, and, when seen from above, the infrared LED 12 is arranged in the position where the

infrared LED 12 emits the infrared light to the head of the viewer 13. The light, illuminated from the infrared LED 12 to the viewer 13, impinges on the head of the user 13, so as to be reflected thereby to travel through the Fresnel lens 2 in a direction opposite to the direction of the light illuminated from the back light 3, that is in a direction proceeding from the viewer 13 towards the back light 3, to form an image on the back surface of the liquid crystal display device 1. The light reflected by the infrared LED 12 is received by the two light receiving devices 6 arranged on the front sides of the polarizing filter unit for the right eye 4 and the polarizing filter unit for the left eye 5, that is on the light illuminating side. The arraying positions of the light receiving devices 6 are proximate to the polarizing filter unit for the right eye 4 and the polarizing filter unit for the left eye 5 at approximately equal positions in the left and right direction from the boundary of the polarizing filter unit for the right eye 4 and the polarizing filter unit for the left eye 5. The distance between the light receiving devices 6 may be optionally set depending on operating conditions, such as the size of the liquid crystal display apparatus.

[0032]

If, for example, the optimum position of the viewer 13 appreciating the 8.4 inch liquid crystal display surface is 50 cm from the Fresnel lens 2, and if the approximate parallel surface of the head of the viewer 13 is 12 cm, as shown in Fig.5, the light illuminated by the infrared LED 12 and reflected by the head of the viewer 13 forms an image 37.2 mm in width at a site on the back surface side of the Fresnel lens 2

which is 15.5 cm apart from the Fresnel lens 2. If, for example, the receiving devices 6 are arranged on the back surface of the Fresnel lens 2 at a position 14 cm apart from the Fresnel lens 2, the image of the head is blurred along its boundary line 33 mm in width. At this position, the two left and right light receiving devices 6 are receiving the reflected light homogeneously.

[0033]

The width of the image of the head part is varied with the position in the fore-and-aft direction of the head, that is with the distance from the Fresnel lens 2. If, for example, the head of the viewer 13 is off 75 cm from the Fresnel lens 2, the image of the head becomes an image 22.4 mm in width at the position of the light receiving devices 6. In this case, the head itself is not planar and hence the neighborhood of the image is blurred.

[0034]

So, the interval between the left and right light receiving devices 6 is set to approximately 25 mm. By so setting, the two left and right light receiving devices 6 are uniformly receiving the infrared light reflected by the infrared LED 12.

[0035]

Fig.6 shows an optimum state for appreciating a stereo image, that is a state in which the image of the head is evenly formed with respect to the two left and right light receiving devices 6. In such state, the head of the viewer 13 and the center of the Fresnel lens 2, that is the center position of the receiving devices 6, when viewed

from above, are arrayed on a straight line.

[0036]

Then, if the head is moved leftward towards the Fresnel lens 2 by the movement of the viewer 13, such that the image of the head is moved rightward towards the Fresnel lens 2 due to movement of the viewer 13, there is produced a level difference in the volumes of the light received by the two left and right light receiving devices 6, as shown in Fig.7. The forward/reverse inverting driving circuit of the back light position controller is preset so that, if the level difference is produced in the received light volumes in the two light receiving devices 6, a command is issued to cause movement of the back light 3 in the direction towards that one of the two light receiving devices having a larger volume of the received light, that is in a direction of movement of the image of the head. In the present case, since the image of the head has been moved leftwards towards the Fresnel lens 2 and the light receiving device 6 lying leftwards towards the Fresnel lens 2 is receiving more light, the forward/reverse inverting driving circuit 10 of the back light position controller issues a command signal for causing leftward movement of the back light 3 towards the Fresnel lens 2, whereby the back light 3 is moved leftwards as viewed towards the Fresnel lens 2. The light receiving devices 6 are arranged for performing the movement in unison with the back light 3 so that the receiving devices 6 are also moved leftwards towards the Fresnel lens 2, along with the back light 3. So, and the light receiving devices 6 and the back light 3 are moved as far as a position in which

the levels of the received light volumes in the left and right light receiving devices 6 equal to each other. Then, such a state is reached in which the head of the viewer 13, the center of the Fresnel lens 2 and the center position between the light receiving devices 6, that is the boundary between the polarizing filter unit for the right eye 4 and the polarizing filter unit for the left eye 5 are aligned, as shown in Fig.8. Simultaneously, the stereo vision area 18, is moved to an appropriate position for the viewer to appreciate the stereo vision image.

[0037]

If the head is moved right towards the Fresnel lens 2, such that the image of the head has been moved right towards the Fresnel lens 2, the light receiving device 6 lying rightwards towards the Fresnel lens 2 is receiving more light. So, the forward/reverse inverting driving circuit 10 of the back light position controller issues a command for causing movement of the back light 3 rightwards towards the Fresnel lens 2, whereby the back light 3 is moved rightwards towards the Fresnel lens 2. Simultaneously, the stereo vision area 18 also is moved to a proper position for the viewer to appreciate the stereo image.

[0038]

For causing movement of the light receiving devices 6 and the back light 3, such a method may be used which consists in retaining the back light by a wire wound about a pulley 19 of a motor 11 fitted with a speed reducer to cause movement of the back light 3, as shown in Fig.9.

[0039]

Instead of moving the back light 3 itself, the boundary position between the polarizing filter unit for the right eye 4 and the polarizing filter unit for the left eye 5 may be shifted (polarized light back light system). In such case, the back light 3 elongated in the left and right direction is used, and a number of strip-shaped Brewster angle variable type liquid crystals 20, as the variable Brewster angle devices capable of controlling the Brewster angle by voltage application, are arranged as the polarizing filter unit for the right eye 4 and the polarizing filter unit for the left eye 5, whilst light receiving devices are arranged on each strip-shaped Brewster angle variable type liquid crystal 20, as shown in Fig. 10. The polarizing filter unit for the right eye 4 and the polarizing filter unit for the left eye 5 are formed by applying the voltage to the Brewster angle variable type liquid crystals 20, so that, in case the image 21 of the head is formed as shown in Fig.11, the Brewster angles cross each other with the boundary A of the strip-shaped Brewster angle variable type liquid crystals 20 as the boundary. The polarizing filter unit for the right eye 4 and the polarizing filter unit for the left eye 5 are also formed by applying the voltage to the Brewster angle variable type liquid crystals 20, so that, in case the image 21 of the head is formed as shown in Fig.12, the Brewster angles cross each other with the boundary B of the strip-shaped Brewster angle variable type liquid crystals 20 as the boundary. With this structure, the position of the light source illuminating the liquid crystal display device 1 can be changed by causing movement of the position between

the polarizing filter unit for the right eye 4 and the polarizing filter unit for the left eye 5 without causing movement of the back light 3 itself.

[0040]

As a first modification of the liquid crystal display device, described above, a liquid crystal display device 1' configured as shown in Fig.13 may be used. Referring to Fig.13, a liquid crystal display device 1' includes a liquid crystal panel 14 and two polarizing filters 15', 16' arranged on both sides of the liquid crystal panel 14. The structure of the liquid crystal panel 14 is the same as described above. The two polarizing filters 15', 16' are linear polarizing filters having the same plane of polarizations in their entirety, with the respective light plane of polarizations lying at right angles to each other. The polarizing filter 16' on the side back light 3 is fitted with half wave plates 22 every other horizontal line of the liquid crystal panel 14. These half wave plates 22 are arranged for radiating the light of the incident light is rotated 90°, as shown in Fig.14.

[0041]

In Fig.15, the polarized light in the leftward ascending direction cannot traverse the polarizing filter line in the absence of the half wave plates 22. If these half wave plates 22 are provided, the polarized light in the leftward ascending direction is rotated 90° to provide the polarized light in the rightward ascending direction and hence can traverse the polarizing filter line. Conversely, the polarized light in the rightward ascending direction can traverse the polarizing filter line in the absence of the half



wave plates 22. If these half wave plates 22 are provided, the polarized light in the rightward ascending direction is rotated  $90^\circ$  to provide the polarized light in the leftward ascending direction and hence cannot traverse the polarizing filter line. The direction of polarization of the light which has just entered the polarization filter on the side back light 3 is unexceptionally in the rightward ascending direction so that the direction of polarization towards the viewer 13 may unexceptionally be in the leftward ascending direction to permit facilitated fabrication.

[0042]

As a second modification of the liquid crystal display device 1, described above, a liquid crystal display device 1" configured as shown in Fig.16 may be used. In Fig.16, the liquid crystal display device 1" includes a liquid crystal panel 14 and two polarizing filters 15", 16" provided on both sides thereof. Although the liquid crystal panel 14 and the polarizing filter towards the back light 3 are similar in structure to those of the first embodiment, the polarizing filter towards the viewer 13 is formed by a linear polarizing filter having the same plane of polarization over its entire surface. It should be noted that this plane of polarization is the same as the rightwardly ascending plane of polarization of the linear polarizing filter or as the leftwardly ascending plane of polarization of the linear polarizing filter on the side back light. In the lines of the polarizing filters 15", 16" having the same direction of polarization, the driving condition (driving voltage) is set in a reverse fashion relative to each other. In the present second modification, the polarizing filters on the side

viewer 13 may be set to the same polarization direction over the entire surfaces, thus again enabling inexpensive fabrication.

[0043]

In the above-described first embodiment and in the above-described first and second embodiments, in which linear polarizing filters are used as the polarizing filter unit for the right eye 4 and the polarizing filter unit for the left eye 5, liquid crystal display devices 1, 1', 1" and the polarizing filters are of the linear polarization. However, circular polarization may be used in a similar manner to achieve similar favorable results.

[0044]

So, according to the present invention, the movement of the head of the viewer may be automatically followed in a manner as described above. Moreover, by controlling the position of the stereo vision area in meeting with the movements of the head of the viewer, the eye of the viewer may be positioned at all times in the stereo vision area so that a high precision stereo image can be viewed even in case the head of the viewer is deflected in the left and right direction.

[0045]

## Second Embodiment

The second embodiment is directed to liquid crystal display apparatus which is able to cope with movements in the up-and-down direction of the head and which is able to demonstrate a stereo image of high accuracy in a manner free from crosstalk

of the picture information.

[0046]

Fig.17 is a longitudinal cross-sectional view schematically showing a typical configuration of a liquid crystal display apparatus embodying the present invention.

[0047]

First, the structure of the liquid crystal display apparatus is explained. At a preset distance from the back surface of a liquid crystal display device 23 is arrayed a Fresnel lens (not shown in Figs) formed of a convex lens operating as optical means.

[0048]

At a preset distance from the back surface of the Fresnel lens is arrayed a back light (not shown in Figs) as a light source for illuminating the liquid crystal display device 23 from its back side. On the front side of the back light, that is on the light illuminating side thereof, a polarizing filter unit for the right eye and a polarizing filter unit for the left eye are arranged on left and right sides of the center as a boundary. The polarizing filter unit for the right eye and the polarizing filter unit for the left eye are formed as linear polarizing filters having the direction of polarization extending at right angles to each other, here, with the rightward ascending plane of polarization and the leftward ascending plane of polarization, respectively.

[0049]

The liquid crystal display device 23 is of the light transmitting type and

includes a liquid crystal panel 14, a first polarizing filter 24 arranged on the side viewer of the liquid crystal panel 14 and a second polarizing filter 25 arranged on the inner surface towards the back light 3 of the liquid crystal panel 14.

[0050]

The liquid crystal panel 14 includes liquid crystals twisted  $90^\circ$ . If no voltage is applied across a pair of the orientation films, the incident light is radiated as rotated through  $90^\circ$  and, if voltage is applied across a pair of the orientation films, the incident light is directly radiated, without rotating the incident light. A protective film 27 is formed on the inner surface of the first glass substrate 26, which is the one of the paired glass substrates directed to the viewer 13, that is a major surface thereof holding the liquid crystal. On the protective film 27 is formed a transparent electrode plate 28 formed of ITO. A color filter 32 is formed through a transparent protective layer 31 on the inner surface of the second glass substrate 31, which is the one of the paired glass substrates directed to the back light 3, that is on the major surface thereof holding the liquid crystal. On the major surface of the color filter 32 is formed a protective film 27 on which is formed a transparent electrode plate 28 of ITO. A plural number of half wave plates 30 are mounted on the second polarizing filter every other horizontal line of the liquid crystal panel 14.

[0051]

The first and second polarizing filters 24, 25 are linear polarizing filters having the same plane of polarization over the entire surfaces, with the two plane of

polarizations being set to a perpendicular direction relative to each other. Towards the second glass substrate of the second polarizing filter are annexed a plural number of half wave plates 30 every other horizontal line of the liquid crystal panel 14. These half wave plates 30 are adapted to emit the incident light as rotated thereof through  $90^\circ$ , as shown in Fig. 14.

[0052]

In Fig. 15, the polarized light in the leftward ascending direction cannot traverse the polarizing filter line in the absence of the half wave plates 30. If these half wave plates 30 are provided, the polarized light in the leftward ascending direction is rotated  $90^\circ$  and prove the polarized light in the rightward ascending direction and hence can traverse the polarizing filter line. Conversely, the polarized light in the rightward ascending direction can traverse the polarizing filter line in the absence of the half wave plates 30. If these half wave plates 30 are provided, the polarized light in the rightward ascending direction is rotated  $90^\circ$  and prove the polarized light in the leftward ascending direction and hence cannot traverse the polarizing filter line. The direction of polarization of the light which has just entered the second polarizing filter is unexceptionally in the rightward ascending direction so that the direction of polarization first polarizing filter 24 may unexceptionally be in the leftward ascending direction to permit facilitated fabrication.

[0053]

On the other hand, the liquid crystal panel 14 of the liquid crystal display

device 23 is constructed and designed so that the picture information for the right eye and that for the left eye are alternately demonstrated every other horizontal line in agreement with the light transmitting lines of the first and second polarizing filters 24, 25.

[0054]

In the present invention, the second polarizing filter 25 is arranged not on the outer side but within the liquid crystal display device 23. By arranging the second polarizing filter 25 not on the outer side but within the liquid crystal display device 23, the liquid crystal material arranged within the liquid crystal panel 14 may be extremely proximate to the second polarizing filter 25, with the distance there between being diminished appreciably.

[0055]

The light incident on the second polarizing filter 25 is desirably incident in its entirety in a direction perpendicular to the polarizing filters. In actuality, however, there is the light incident from an oblique direction to the major surfaces of the polarizing filters. In this case, the light incident on the major surfaces of the polarizing filters from the oblique direction is incident not on the horizontal line of the liquid crystal panel 14 corresponding to the light incident position of the polarizing filters but on the horizontal line offset from the above-mentioned horizontal line. The result is that the image information on the line which inherently should not be visible enters the eye as it is superposed as cross-talk on the inherent

image information to render the image extremely difficult to view. It is noted that the deviation from the horizontal line on which the light should inherently fall becomes larger the longer the distance between the second polarizing filter 25 and the pixel in the liquid crystal panel 14. That is, by diminishing the distance between the polarizing filter on the side back light and the pixel, it is possible to prevent the image information on the line which inherently should not be visible from entering the eye as cross-talk by being superimposed on the inherent image information. This phenomenon occurs when the head of the viewer 13 is moved in the up-and-down, in which case the image information on the line which inherently should not be visible enters the eye as cross-talk by being superimposed on the inherent image information to render the image extremely difficult to view.

[0056]

So, according to the present invention, the second polarizing filter is arranged not on the outer side but within the liquid crystal display device 23, whereby the second glass substrate 29 may be eliminated from a space between the liquid crystal material arranged in the liquid crystal panel on one hand and the second polarizing filter 25 to provide for a shorter distance there between to establish an extremely proximate state. This prevents cross-talk of the image information even in case the head of the viewer is moved in the up-and-down direction, while enabling the viewer to see a high precision stereo view.

[0057]

Moreover, since the present liquid crystal display device 23 includes the color filter 32, it is possible to transmit only the light of a preset wavelength as well as to create an image of a desired color. There is no particular limitation to the color filter 32 such that any suitable known type of the color filter may be used.

[0058]

The liquid crystal display device may be fabricated as follows:

[0059]

First, the protective film 27 is formed on the inner major surface of a first glass substrate 26, as a substrate on the side viewer 13, that is on the major surface holding the liquid crystal, and a transparent electrode plate 28 of ITO is formed on the protective film 27.

[0060]

On the other hand, a linear polarizing plate, having the same plane of polarization on its entire surface, is bonded, as a second polarizing filter 25, on one major surface of the third glass substrate 31, arranged between the first glass substrate 26 as the viewer side substrate and the second glass substrate 29 as the back light side substrate.

[0061]

On this linear polarizing plate are bonded half wave plates 30 every other line of the liquid crystal panel 14.

[0062]



Then, on the opposite side major surface of the third glass substrate 31, there is formed the protective film 27, and the transparent electrode plate 28 of ITO is formed on the protective film 27.

[0063]

The first glass substrate 26 and the third glass substrate 31 then are bonded together so that the respective transparent electrode 28 thereof face each other. The second glass substrate 29 then is bonded to the third glass substrate 29 so that the respective transparent electrode plates 28 face each other. The second glass substrate 29 then is bonded to the major surface of the transparent protective layer 31 on the major surface of the transparent protective layer 31 carrying the half wave plates 30.

[0064]

The liquid crystal then is poured and sealed. On the front major surface of the first glass substrate 26, a linear polarizing plate, having the same plane of polarization on its entire surface, is bonded as the first polarizing filter 24, so that the Brewster angle of the first polarizing filter and that of the second polarizing filter will be at right angles to each other, to complete the desired liquid crystal display device 23.

[0065]

For forming the half wave plates 30, the following method may also be used. First, a half wave plate 29 of approximately the same size as the second glass substrate 29 is bonded on the second glass substrate 29, such as with lamination, and a mask having an opening every other horizontal line of the liquid crystal panel 14 is

superimposed on the second glass substrate 29. The resulting assembly is irradiated with e.g., the infrared laser. This locally heats the high molecular material of the portions of the half wave plates 30 irradiated with the laser light to a temperature not lower than the transition temperature to set up an amorphous state to eliminate the phase difference. So, the half wave plates 30 may be formed every other horizontal line on the liquid crystal panel 14.

[0066]

As a first modification of the liquid crystal display device 23, described above, a liquid crystal display device 23', configured as shown in Fig.18, may be used. Referring to Fig.18, the liquid crystal display device 23' is of the light transmitting type and includes a liquid crystal panel 14, a first polarizing filter 24' arranged on the side viewer 13 of the liquid crystal panel 14 and a second polarizing filter 25' arranged on the inner surface of the side back light 3 of the liquid crystal panel 14. The liquid crystal panel 14 includes liquid crystals twisted  $90^\circ$  in a pair of glass substrates. If no voltage is applied across a pair of the transparent electrode plates, the incident light is radiated as rotated through  $90^\circ$  and, if voltage is applied across a pair of the transparent electrode plates, the incident light is directly radiated, without rotating its polarization plane.

[0067]

A protective film 27 is formed on the inner surface of the first glass substrate 26', which is the one of the paired glass substrates directed to the viewer 13, that is

on the major surface thereof holding the liquid crystal. On the protective film 27 is formed a transparent electrode plate 28 formed of ITO. A second polarizing filter 25' of the second one 29' of the paired glass substrates facing the back light 3 has a second polarizing filter 25' on its inner surface, that is on its major surface holding the liquid crystal. On the protective film 27 is formed the transparent electrode plate 28.

[0068]

The first polarizing filter is formed as a linear polarizing filter having the same plane of polarization over its entire surface. It should be noted that this plane of polarization is the same as the rightwardly ascending plane of polarization of the linear polarizing filter or as the leftwardly ascending plane of polarization of the linear polarizing filter on the side back light.

[0069]

The second polarizing filter 25' is formed by rightwardly ascending linear polarizing filter lines arranged in alternation with leftwardly ascending linear polarizing filter lines.

[0070]

In this case, the state of the transmitting light to the liquid crystal in case no voltage is applied across a pair of orientation films differs depending on the horizontal lines. That is, since there are a normal white mode and normal back mode, the driving condition (driving voltage) is set reversely with respect to the routine normally white mode for the line, for which the direction of polarization is the same

for both polarization filters 24', 25', so that driving is performed in the normally black mode.

[0071]

In a first modification, the second polarizing filter 25' is formed by a layer containing a polarizing device. As the polarizing device, a lyotropic liquid crystal dichromic molecules may preferably be employed. The lyotropic liquid crystal dichromic molecules exhibit liquid crystal properties if the solvent is left and hence are oriented depending on the directly underlying layer of the dichromic molecules. When dried, the dichromic molecules are solidified in the crystal or amorphous state as this orientation is kept to exhibit the properties as the polarizing device.

[0072]

The liquid crystal display device 23' may be fabricated as follows:

[0073]

First, the protective film 27 is formed on the inner major surface, that is on the liquid crystal holding side major surface, of the first glass substrate 26', as a substrate on the side back light 3, and the transparent electrode plate 28 of ITO is formed on the protective film 27.

[0074]

Then, a solution for the orientation layer is coated on the inner major surface, that is on the liquid crystal holding side major surface, of the second glass substrate 29'. A mask having openings in register with every other line is superimposed on the

major surface coated with an optically active solution for the orientation layer and light having an electrical field vector in a desired polarizing direction is illuminated for orientation.

[0075]

The mask is shifted in the up-and-down direction by one line and, as the substrate is rotated 90°, the light is illuminated to form an orientation layer.

[0076]

Moreover, using a polarizing device having the direction of polarization extending at right angles on the line basis, prepared in the course of fabrication of this substrate, as a mask, orientation processing may be achieved by non-polarizing lumped light exposure.

[0077]

If necessary, the orientation may be fixed by heating.

[0078]

As the material for the orientation layer, high molecular materials, such as polyvinyl alcohol, polyimide or polyacrylate, may be used. Film forming may be by any suitable known methods, such as a spin coating method, a printing method or a casting method. An ultra-thin film, such as Langmuir project film or a self-organizing film, may be used.

[0079]

If the polarizing filter portion is formed in a split form, as described above,

such molecules that may become anisotropic on irradiation with linear polarized light and that exhibits liquid crystal orientation capability may preferably be used. It is possible to use optically active molecules that produce changes in orientation of the molecular axes by linear polarization, such as azobenzene or stilbernzene.

[0080]

As the method for orienting the orientation layer, thus formed, in a preset direction, the above-described optical orientation method is used if the polarizing filter portion is split. If it is unnecessary to split the polarizing filter portion, a rubbing method may preferably be used. The rubbing method, consisting in mechanically rubbing a high molecular resin film with e.g., a cloth, is conveniently used for orienting liquid crystals. The preset direction is such a direction in which the dichromic molecular layer, the orientation in which is induced by an orientation layer, exhibits the function as a preset polarizing optical device.

[0081]

As an alternative method, it is possible to provide a resin film layer having a liquid crystal orienting capability, such as polyimide, to coat it with a resist on the line basis to effect rubbing, to remove the resist, to coat the rubbed portion with a resist and to effect rubbing as the substrate is rotated 90°.

[0082]

The orientation layer, thus prepared, is coated with a solution of the density transition type liquid crystal dichromic molecules. Although gray pigments may be

used as this dichromic molecules, it is possible and desirable for the polarizing device to exhibit a color filter function by pattern coating a solution of density transition type liquid crystal dichromic molecules by printing.

[0083]

It is also possible to provide an adhesive layer on a preset substrate and to bond the adhesive layer on the dichromic molecular layer prepared at the outset on a separate substrate, with the substrate then being peeled off.

[0084]

The protective film 27 then is formed on the layer of the dichromic molecules and the transparent electrode plate 28 of ITO is formed on this protective film 27.

[0085]

The first glass substrate 26' and the second glass substrate 29' are bonded together so that the respective ITO transparent electrode plates 29' face each other and the liquid crystal then is poured and sealed. A linear polarizing plate, having the same plane of polarization on its entire surface, is bonded, as the first polarizing filter 24', to the front major surface of the first glass substrate 26', so that the plane of polarization of the first polarizing filter 24' and the plane of polarization of the second polarizing filter 25' are at right angles to each other, to complete the desired liquid crystal display device 23'.

[0086]

On the above-mentioned orientation layer, solutions of red, green and blue

density transition type liquid crystal dichromic molecules are sequentially printed and dried in situ by a printing method or by a roll coating method to complete the liquid crystal display device 123 also having the color filter function.

[0087]

As a second modification of the liquid crystal display device, described above, a liquid crystal display device 23", configured as shown in Fig.19, may be used. In Fig.19, the liquid crystal display device 23" is of the light transmitting type and includes a liquid crystal panel 14, a first polarizing filter 24" arranged on the side viewer 13 of the liquid crystal panel 14 and a second polarizing filter 25" arranged on the inner surface of the side back light 3 of the liquid crystal panel 14. The liquid crystal panel 14 includes liquid crystals twisted 90° in a pair of glass substrates. If no voltage is applied across the transparent electrode plates, the incident light is radiated as its polarization surface is rotated through 90° and, if voltage is applied across the transparent electrode plates, the incident light is directly radiated, without rotating its incident light.

[0088]

A protective film 27 is formed on the inner surface of the first glass substrate 26", which is the one of the paired glass substrates directed to the viewer 13, that is a major surface thereof holding the liquid crystal. On the protective film 27 is formed a transparent electrode plate 28 formed of ITO. On the inner surface of the second glass substrate 29", as the back light side substrate of the paired glass substrates, that



is on the major surface of the liquid crystal holding side, a second polarizing filter 25" is formed, on the major surface of which a quarter wave plate 33 is formed. On the quarter wave plate 33 are formed color filters 32, on which a protective film 27 and a transparent electrode plate 28 of ITO are formed.

[0089]

On the back light 3, not shown in Figs, there is arranged a quarter wave plate on the front sides, that is on the light radiating sides, of the polarizing filter for the right eye 4 and the polarizing filter for the left eye 5. Thus, the linear polarized light beams, emitted by the back light 3 and which traverse the polarizing filter unit for the right eye 4 and the polarizing filter unit for the left eye 5 in perpendicular directions to each other, are converted by a quarter wave plate into right rotating circular polarized light and into the left rotating circular polarized light which are perpendicular to each other. That is, the right rotating polarized light and left rotating circular polarized light, perpendicular to each other, are incident on the second polarizing filter.

[0090]

It should be noted that the second polarizing filter 25" is formed of a circular polarized light separating device. As this circular polarized light separating device, cholesteric liquid crystal, for example, may preferably be used. The cholesteric liquid crystals totally reflect the circular polarized light having the same spiral direction as the spiral direction, while transmitting only the circular polarized light of

the reverse direction. Thus, if the back light 3 is divided into the right circular polarized light and left circular polarized light for left and right eyes, it is possible to make separation on the lines of the liquid crystal panel 14. So, the second polarizing filter 25" is formed by alternately arraying the cholesteric liquid crystal having the different spiral directions every other horizontal line. Therefore, on a line formed by cholesteric liquid crystals having the right rotating spiral direction in the second polarizing filter 25", the right rotating circular polarized light is reflected to permit passage only of the left rotating circular polarized light. On the horizontal line formed by cholesteric liquid crystals having the left rotating spiral direction, the left rotating circular polarized light is reflected to permit passage only of the right rotating circular polarized light, and hence the cholesteric liquid crystals separate the light into the light for right eyes and that for left eyes. The light separated by the cholesteric liquid crystals, that is by the second polarizing filter 25", and transmitted, is converted by the quarter wave plate 33 into respective perpendicular linear polarized light. If the first polarizing filter 24" is formed by a linear polarizing filter having a plane of polarization on its entire surface coincident with the Brewster angle of one of the mutually perpendicular linear polarized light beams transmitted through the quarter wave plate 33, the driving form is similar to the first modification described above.

[0091]

The liquid crystal display device 23" may be prepared as follows:

[0092]

First, the protective film 27 is formed on the inner major surface, that is on the liquid crystal holding side major surface, of the first glass substrate 26", as a substrate on the side viewer 13, and the transparent electrode plate 28 of ITO is formed on the protective film 27.

[0093]

On the inner major surface, that is on the liquid crystal holding side major surface, of the second glass substrate 29", as a substrate on the side back light 3, right or left rotating cholesteric liquid crystals are formed by printing or roll coating method every other horizontal line of the liquid crystal panel 14, as the second polarizing filter 25", to form a solidified cholesteric liquid crystal layer by adjusting the wavelength range of the reflected light so as to be uniform in the entire visible light range, for example, the wavelength range from 400 to 850 nm. In the horizontal line there between, left or right rotating cholesteric liquid crystals are provided. The sequence of providing the cholesteric liquid crystal layers may be reversed or concurrent as desired.

[0094]

The quarter wave plate 33 then is formed on the cholesteric liquid crystal layer.

[0095]

The color filters 32 then are formed thereon.

[0096]

The protective film 27 then is formed on the color filters 32 and the transparent

electrode plate 28 of ITO is formed on the protective film 27.

[0097]

The first glass substrate 26" and the second glass substrate 29" are bonded together so that the respective ITO transparent electrode 28 face each other and the liquid crystal then is poured and sealed. A linear polarizing plate, having the same plane of polarization on its entire surface, as the first polarizing filter 24", is bonded to the front major surface of the first glass substrate 26" to complete the desired liquid crystal display device 23".

[0098]

In the cholesteric liquid crystal layer, the circular polarized light in the direction opposite to the spiral direction is transmitted, whilst the circular polarized light of the same direction as the spiral direction is selectively reflected. That is, by adjusting the pitch of helix to adjust the wavelength corresponding to the product of the pitch of helix and the refractive index of the liquid crystal, the light of the entire wavelength in the visible range can be reflected to permit the use as a separating film and as a color filter.

[0099]

For example, the fact that the pitch of the cholesteric liquid crystals is changed appreciably with the temperature is exploited to heat the substrate carrying the cholesteric liquid crystals from its lower portion to create a temperature distribution in the up-and-down direction of the substrate. By employing corresponding masks,

the temperature distribution can be controlled to afford desired pitch values. By mixing a polymerization initiator of a suitable concentration, the state of the pitch can be fixed on light irradiation to form a selective wavelength transmission film.

[0100]

Thus, although separate color filters may be provided, as described above, mentioned above, a left rotating or right rotating cholesteric liquid crystal layer may be provided on the right rotating or left rotating spiral cholesteric liquid crystal line on the substrate which selectively transmits only e.g., red light by adjusting the pitch of helix. By providing lines by cholesteric liquid crystals sequentially transmitting green and blue, it becomes possible for the cholesteric liquid crystal layers to perform the role of the color filter simultaneously.

[0101]

The polarizing filter, playing the role of the color filter simultaneously, may e.g., be fabricated as follows:

[0102]

Preferably, a chiral nematic liquid crystal is used for this liquid crystal layer and only the chiral component accounts for the difference between right rotating and left rotating portions. These cholesteric liquid crystal layers are provided every other horizontal line and temperature distribution is created in the up-and-down direction from the lower substrate portion to create distribution in the selective transmission wavelength. When the transmitted light is red (wavelength: 600 to 700 nm), the

ultraviolet light is illuminated through a mask for photo-curing. When next the transmitted light is green, the ultraviolet light is illuminated through a mask for photo-curing. Similarly, when the transmitted light is blue, the ultraviolet light is illuminated through a mask for photo-curing. By providing the quarter wave plate, a polarized light separating substrate having the function of the color filter simultaneously may be produced.

[0103]

It is also possible to provide a cholesteric liquid crystal layer, playing the role of the color filter, laterally of the cholesteric liquid crystal layer used for separating the right rotating circular polarized light and the left rotating circular polarized light from each other. That is, referring to Fig.20, a first cholesteric liquid crystal layer 34 is provided on the second glass substrate 29" for separating the right rotating circular polarized light and the left rotating circular polarized light from each other, and a second cholesteric liquid crystal layer 35 then is provided on the first cholesteric liquid crystal layer 34 for separating only the light of a specified wavelength.

[0104]

The first cholesteric liquid crystal layer 34 is formed by providing cholesteric liquid crystal layers of different spiral directions, specifically plural cholesteric liquid crystal layers having a right spiral direction and plural cholesteric liquid crystal layers having a left spiral direction, every other horizontal line, such that, on the on the right rotating spiral cholesteric liquid crystal lines, the right rotating circular polarized

light and the left rotating circular polarized light undergo total reflection, whilst only the left rotating circular polarized light and the right rotating circular polarized light are transmitted, respectively.

[0105]

The second cholesteric liquid crystal layer 35 forms a cholesteric liquid crystal layer, as a wavelength selective film, having the direction of helix opposite to that of the first cholesteric liquid crystal layer 34 and adapted for transmitting only the light of a specified color, that is the light of a specified wavelength. These cholesteric liquid crystal layers may be prepared similarly to those of the above-described embodiments.

[0106]

With the above-described structure, the first cholesteric liquid crystal layer 34 is able to separate the light for the right eye and that for the left eye, whilst the second cholesteric liquid crystal layer 35 is able to separate the light for the left eye, so that the cholesteric liquid crystal layers alone form the polarizing filter which may be used simultaneously as the color filter 32.

[0107]

The method of arraying the above-described image separating function in proximity to the liquid crystal material is not limited to the typical method described above and may be applied to all sorts of the optical systems. For example, such a

structure may be used in which a second image separating mechanism is provided next to liquid crystal pixels and in which a first image separating mechanism is provided at a preset distance from the second image separating mechanism. The result is that the degree of freedom in viewer head movements is enhanced such that no cross-talk is produced even if the viewer's head is shifted in the up-and-down direction. Moreover, a stereo image of a higher precision may be viewed. By providing the second polarizing filter in proximity to the liquid crystal material, the second polarizing filter can be prepared in the course of the fabrication of the liquid crystal display device, so that the production cost can be appreciably lower than in the conventional external mounting system.

[0108]

By combining the first and second embodiments, it becomes possible to improve the degree of freedom in the viewer head movements both in the left-and-right direction and in the up-and-down direction. The result is that the viewer is not required to wear glasses or the like implement, while the viewer may enjoy a high-precision stereo image with an agreeable feeling since the viewer is not bound to the stereo image viewing enabling area.

[0109]

Referring to Figs.21, 22, the back light 3 may be arranged not in a parallel position but at an angle relative to the liquid crystal display device 23, the liquid crystal display device 23 being then irradiated with light from a plane mirror 36, with



the mirror 36 being collapsed in a container casing 37 during non-use time to reduce the size of the apparatus to realize space saving and improved portability.

[0110]

If, in such case, the Fresnel lens 3 is adapted for being slightly spaced apart from the liquid crystal panel 14 as a result of the opening movement of the mirror 36, it becomes possible to render the moire, otherwise produced due to the presence of grooves of the Fresnel lens 3 and the lattice of the liquid crystal panel 14, to be less obtrusive. If, moreover, a non-spherical mirror is used as the mirror 36, it becomes possible to eliminate the Fresnel lens 3 to eliminate the moire.

[0111]

[Effect of the Invention]

In accordance with the present invention, as described above in detail, the movement of the user's head is detected and the position of the stereo vision may be controlled in keeping with the movement of the viewer's head in order to effect automatic correction such that the viewer's eye will be positioned at all times in the stereo vision area. So, the viewer is able to appreciate the high precision stereo image even in case the viewer's head is deflected in the left-and-right direction.

[0112]

Moreover, according to the present invention, in which the image separating mechanism is mounted next to the pixels, cross-talk of the image information may be prevented from being produced. Thus, the degree of freedom of the movement of the

user's head may be improved so that the user is able to appreciate a high precision stereo image even if the viewer's heads is deviated in the up-and-down direction.

[0113]

By combining the above features, there may be provided a liquid crystal display apparatus in which the degree of freedom in the movement of the viewer's head is increased to enable the viewer to enjoy a high precision stereo image.

[Brief Description of the drawings]

Fig.1 is a schematic plan view showing a liquid crystal display apparatus of a first embodiment of the present invention.

Fig.2 is a schematic view showing the structure of a back light position controller.

Fig.3 is an exploded perspective view of the liquid crystal display apparatus.

Fig.4 is a plan view showing a stereo vision area.

Fig.5 is a plan view for illustrating the relation of distance between the viewer, Fresnel lens and the back light when the viewer is viewing a 8.4 inch liquid crystal display screen.

Fig.6 is a plan view showing the state in which an image of the head is evenly formed with respect to two light receiving devices.

Fig.7 is a plan view showing the state in which an image of the head is offset towards left towards the Fresnel lens with respect to two light receiving devices.

Fig.8 is a plan view showing the state in which the back light position has been

corrected from the state in which the image of the head is offset towards left towards the Fresnel lens with respect to two light receiving devices.

Fig.9 is a perspective view showing the state in which the back light is retained by a wire wound about a pulley of a motor fitted with a speed reducer.

Fig.10 shows a state in which a strip-shaped polarizing filters for right and left eyes are formed by a liquid crystal having a variable Brewster angle.

Fig.11 shows a state in which a voltage is applied to the liquid crystal having a variable Brewster angle to change the boundary between the polarizing fillers for the right and left eyes to a position A.

Fig.12 shows a state in which a voltage is applied to the liquid crystal having a variable Brewster angle to change the boundary between the polarizing filters for the right and left eyes to a position B.

Fig.13 is an exploded perspective view of a liquid crystal display device of a first modification of the first embodiment of the present invention.

Fig.14 shows the polarized state on the half-wave plate.

Fig.15 shows the state of light incidence on the back light side polarizing filter.

Fig.16 is an exploded perspective view of a liquid crystal display device of a second modification of the first embodiment of the present invention.

Fig.17 is a schematic longitudinal cross-sectional view showing the liquid crystal display apparatus of a second embodiment of the present invention.

Fig.18 is a longitudinal cross-sectional view showing a liquid crystal display

device of a first modification of the second embodiment.

Fig.19 is a longitudinal cross-sectional view showing a liquid crystal display device of a second modification of the second embodiment.

Fig.20 is a longitudinal cross-sectional view showing a typical liquid crystal display device having the function as a color filter.

Fig.21 is a side view showing the opened state of a collapsible liquid crystal display apparatus according to the present invention.

Fig.22 is a side view showing the collapsed state of a collapsible liquid crystal display apparatus according to the present invention.

Fig.23 is a longitudinal cross-sectional view for illustrating the point light source system.

Fig.24 is a plan view showing a light source area in case a surface light source for a right eye is substituted from a point light source in a point light source system.

Fig.25 is a plan view showing a light source area in case a surface light source for a right eye and a surface light source for a right eye are substituted from a point light source in a point light source system.

Fig.26 is a plan view showing the state in which the light emitted from a back light is sorted by a line-based polarizing filter and subsequently falls on left and right eyes.

Fig.27 is a perspective view showing the state in which the light emitted from a back light is sorted by a line-based polarizing filter and subsequently falls on left


and right eyes.

Fig.28 is a plan view showing the state in which a surface light source is substituted for a point light source in a point light source system to form a 3D display apparatus.


[Explanation of the Referenced Numerals]

1 liquid crystal display device; 2 fresnel lens; 3 back light; 4 polarizing filter unit for a right eye; 5 polarizing filter unit for a left eye; 6 light receiving device; 7 preamplifier; 8 amplifier; 9 differential amplifier; 10 forward/reverse inverting driving circuit; 11 motor; 12 infrared LED; 13 viewer; 14 liquid crystal panel; 15 first polarization filter; 16 second polarization filter


[FIG.1]

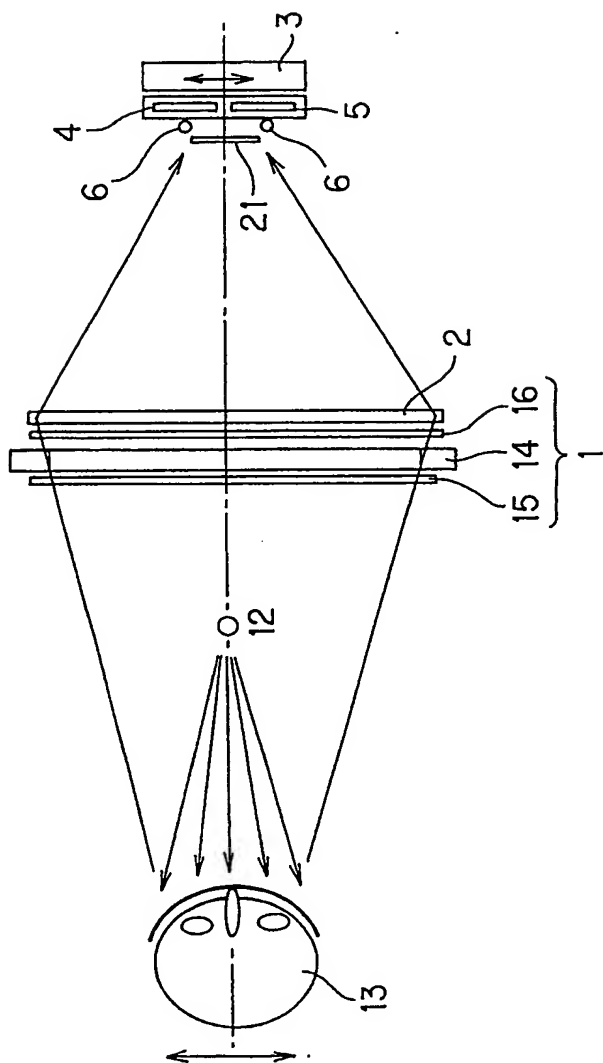


[FIG.2]

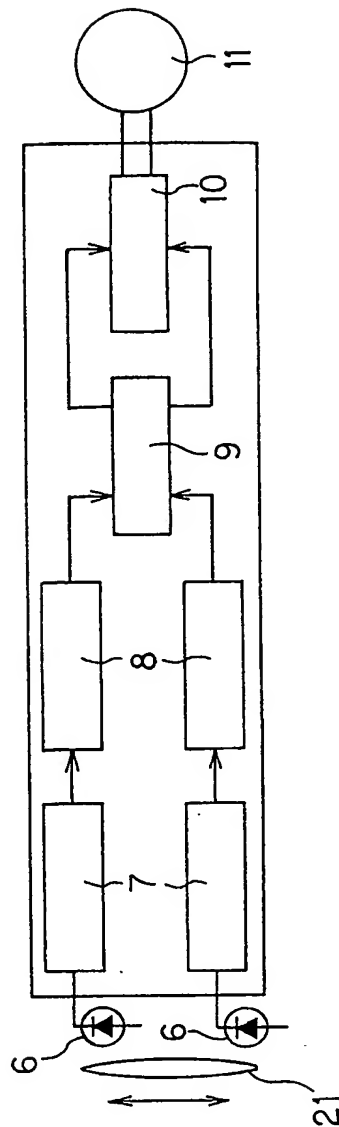

[FIG.3]

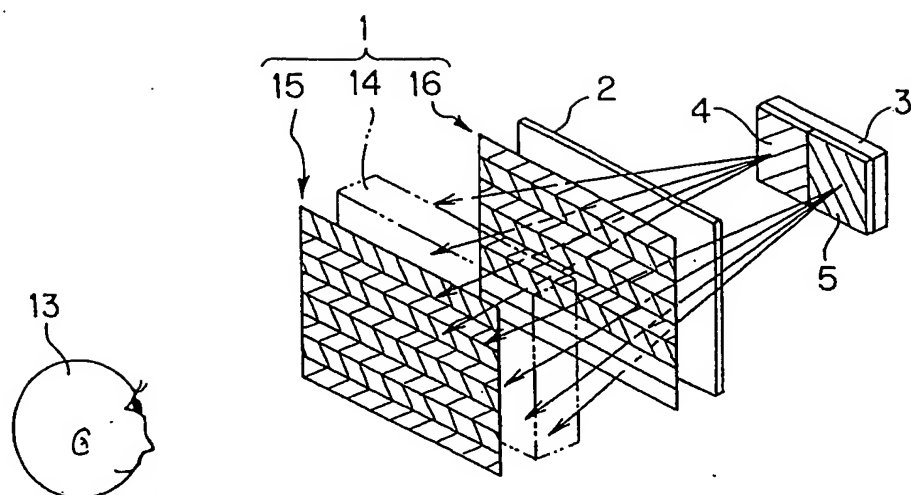


[FIG.4]

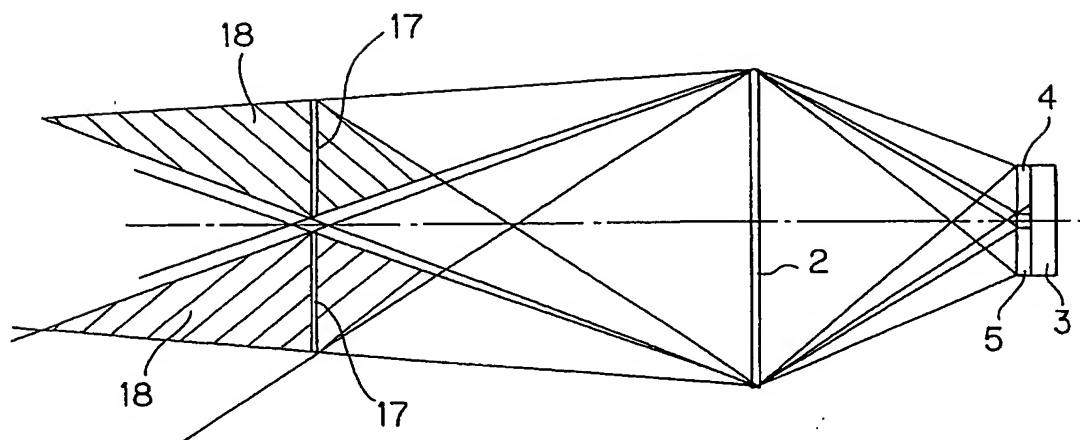

[FIG.5]


liquid crystal display device: 8.4 inch through type  
color liquid crystal (SVGA)

optical device: f/118mm fresnel lens

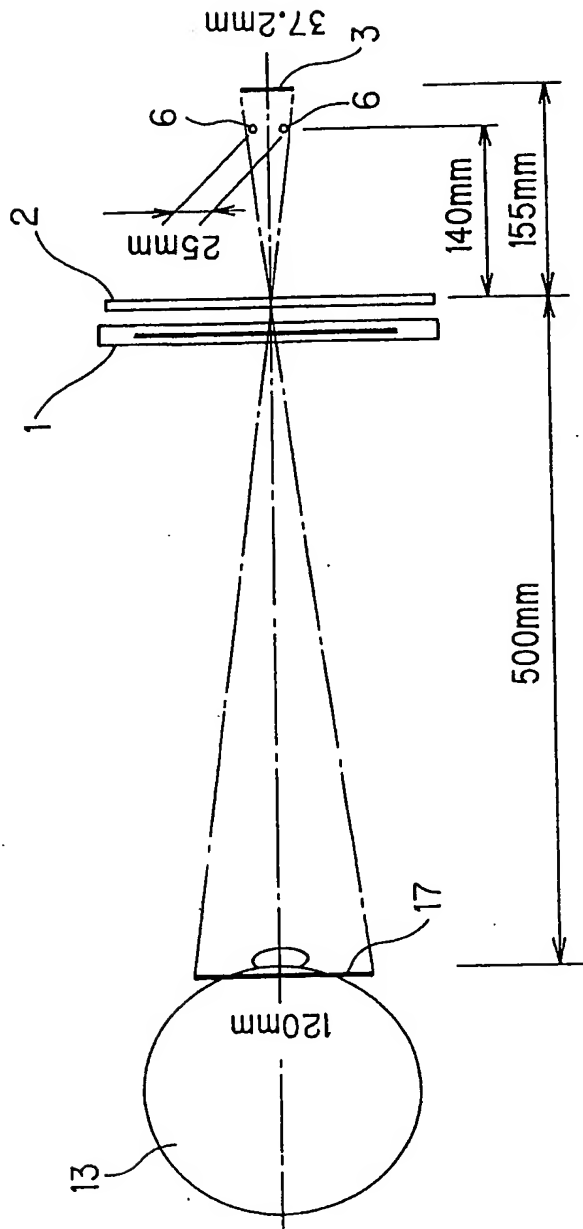





[FIG.6]

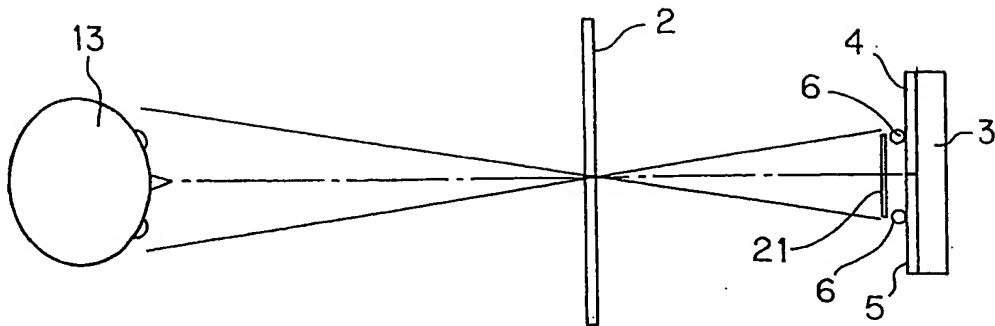


[FIG.7]

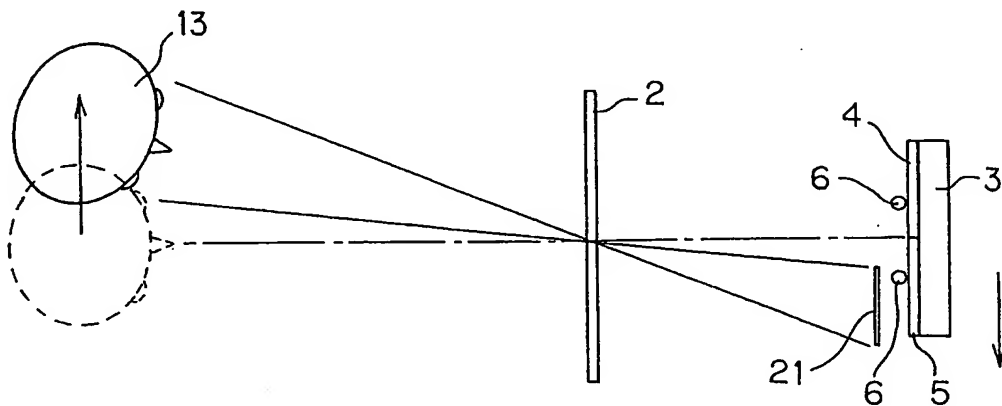


[FIG.8]

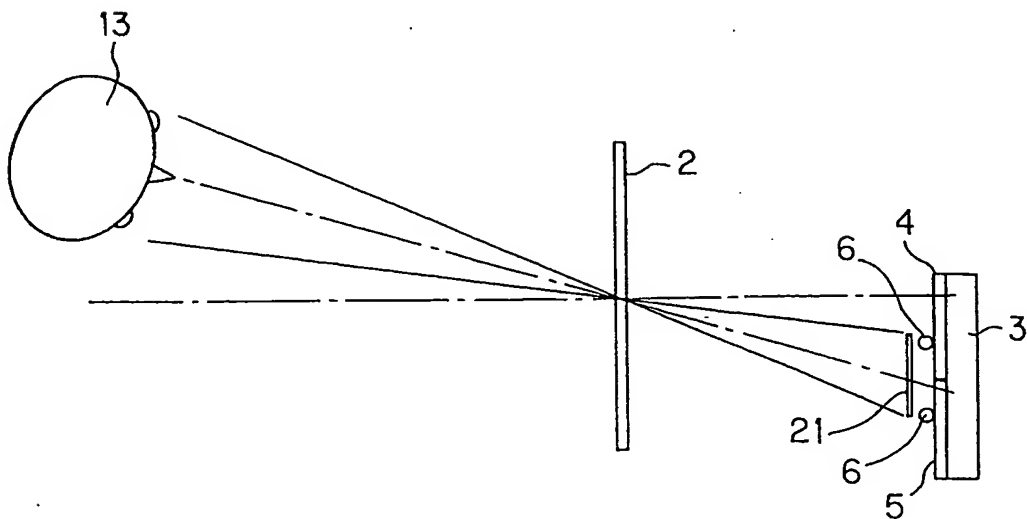


[FIG.9]

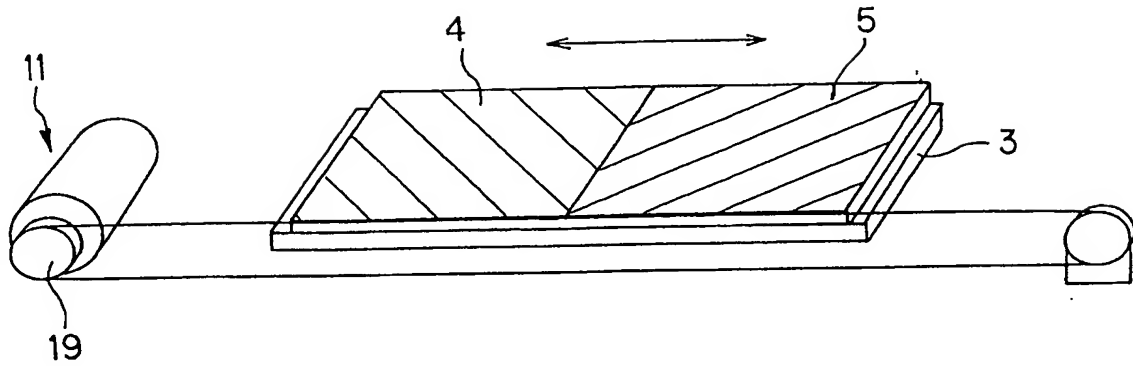


[FIG.10]

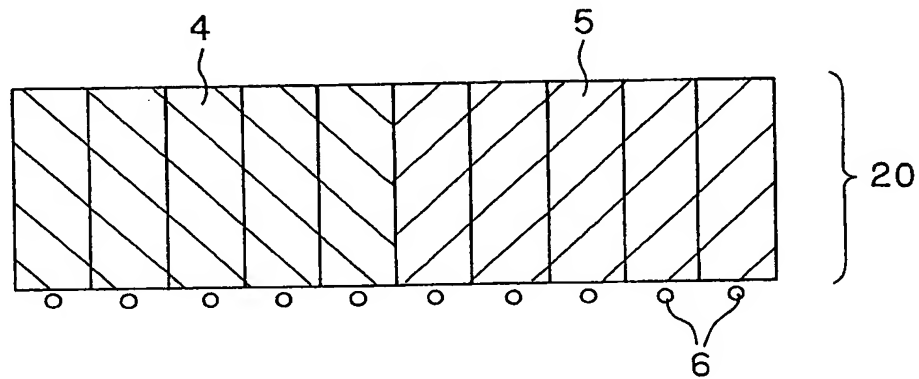


[FIG.11]

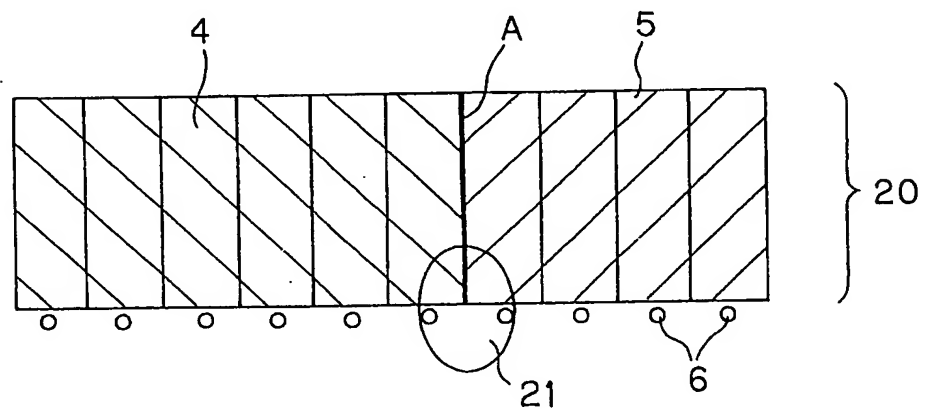


[FIG.12]

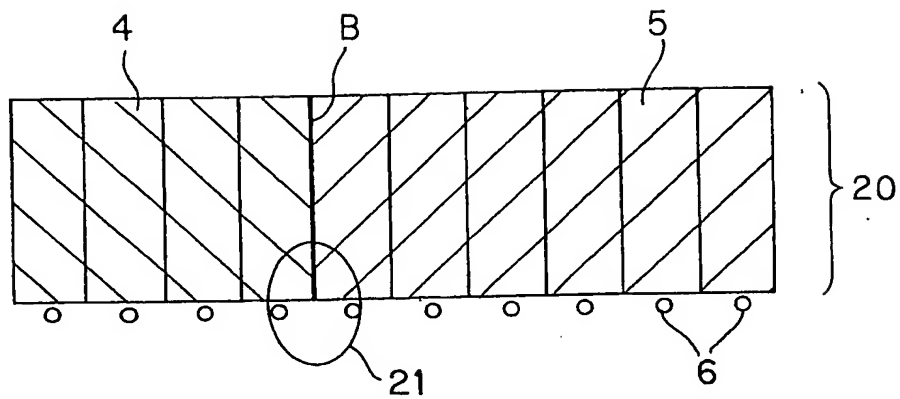

[FIG.13]

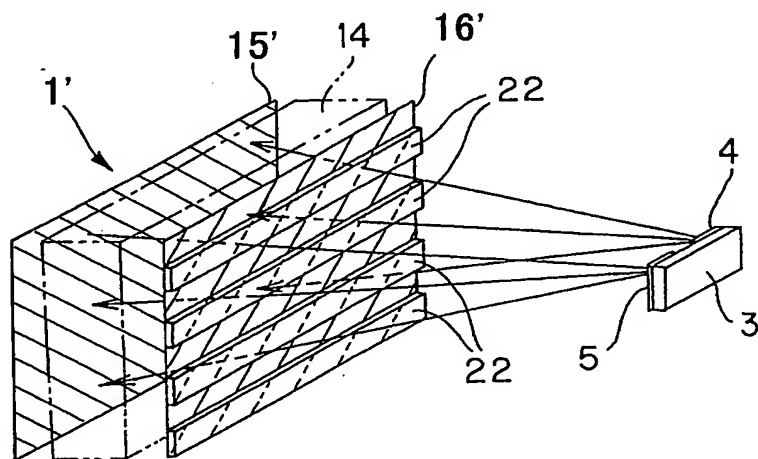


[FIG.14]

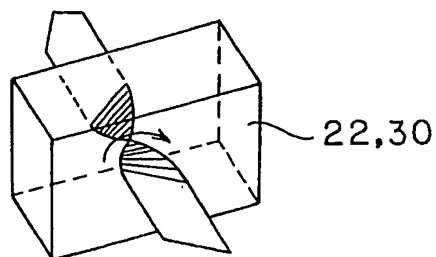





[FIG.15]

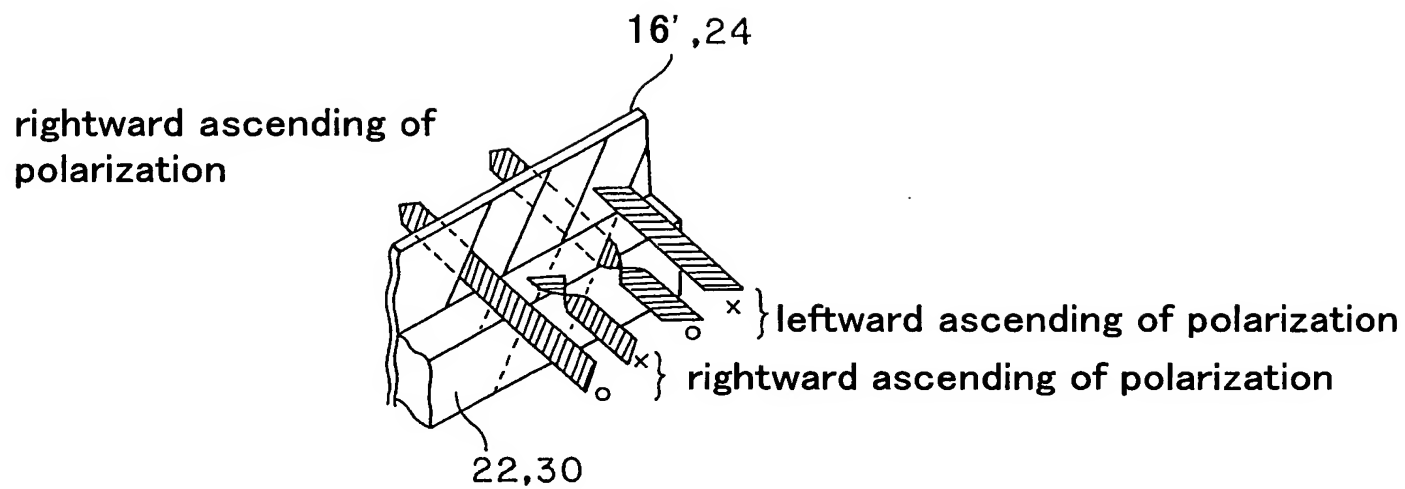



[FIG.16]

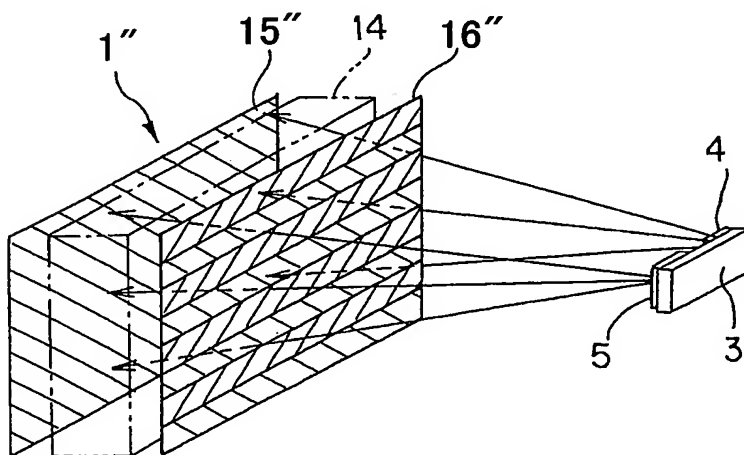


[FIG.17]

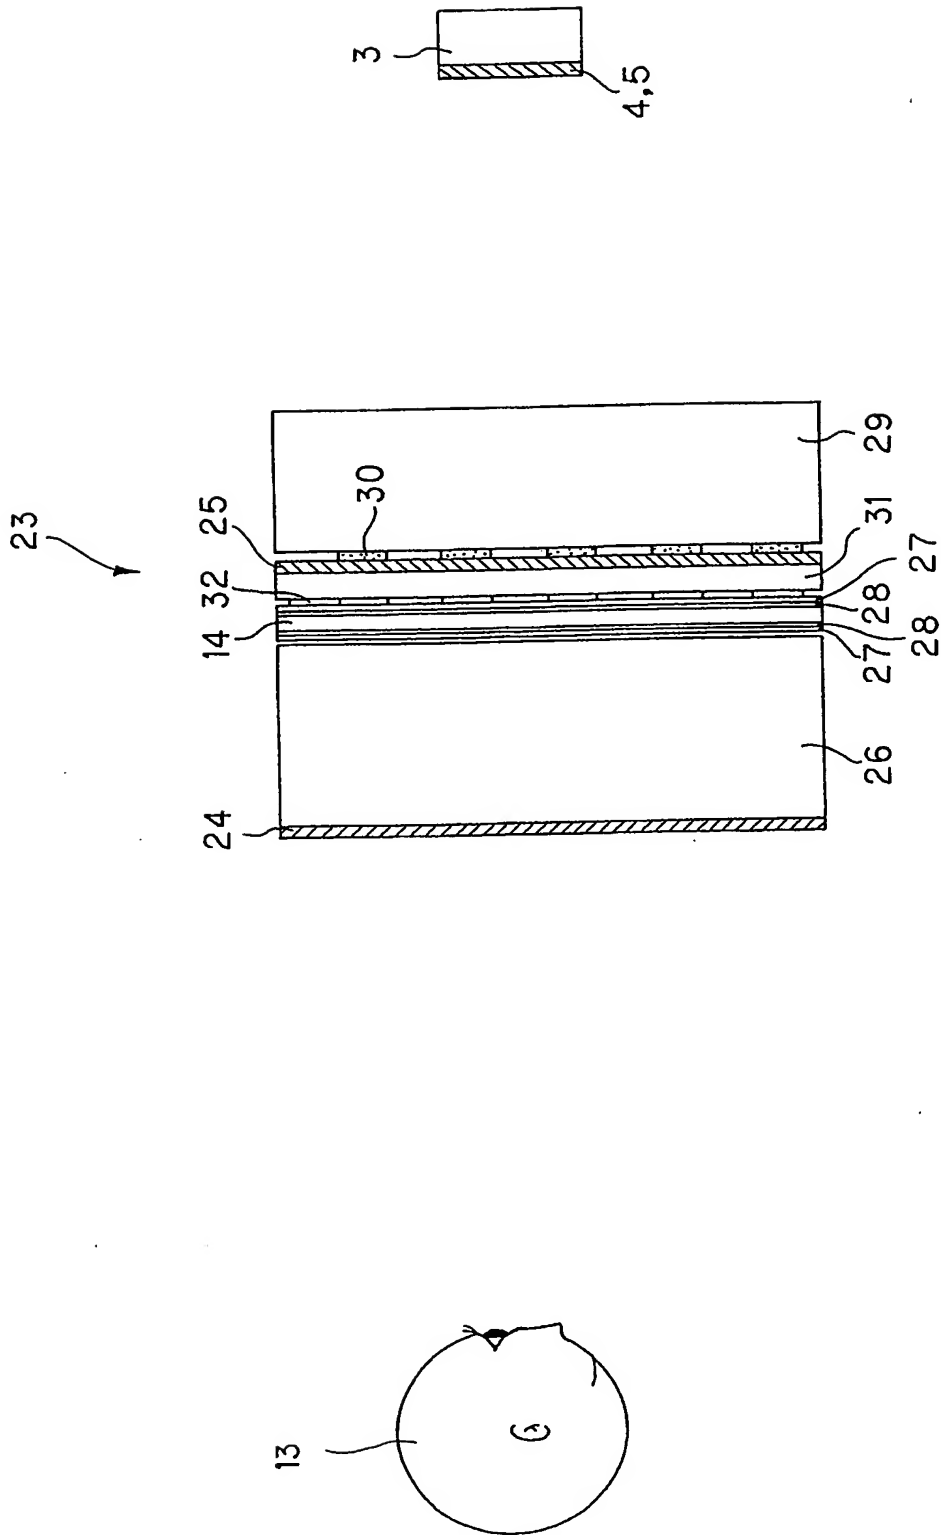

[FIG.18]

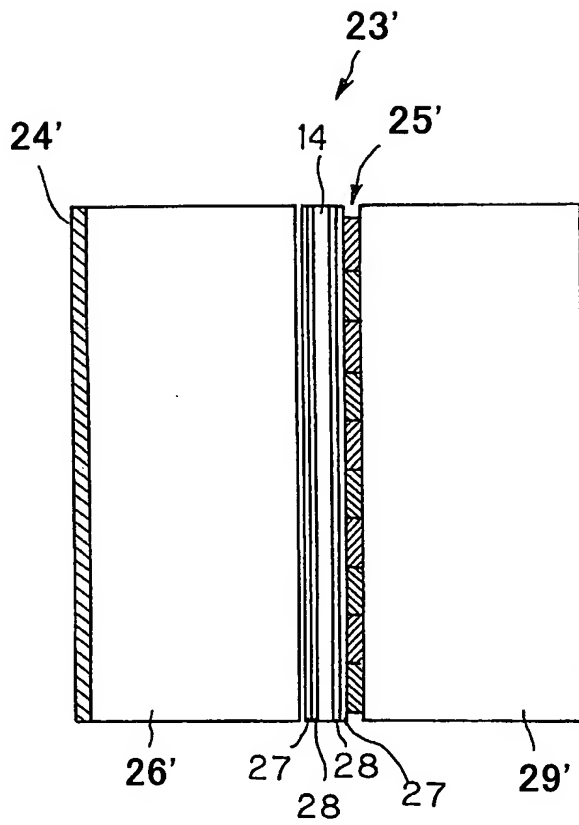


[FIG.19]

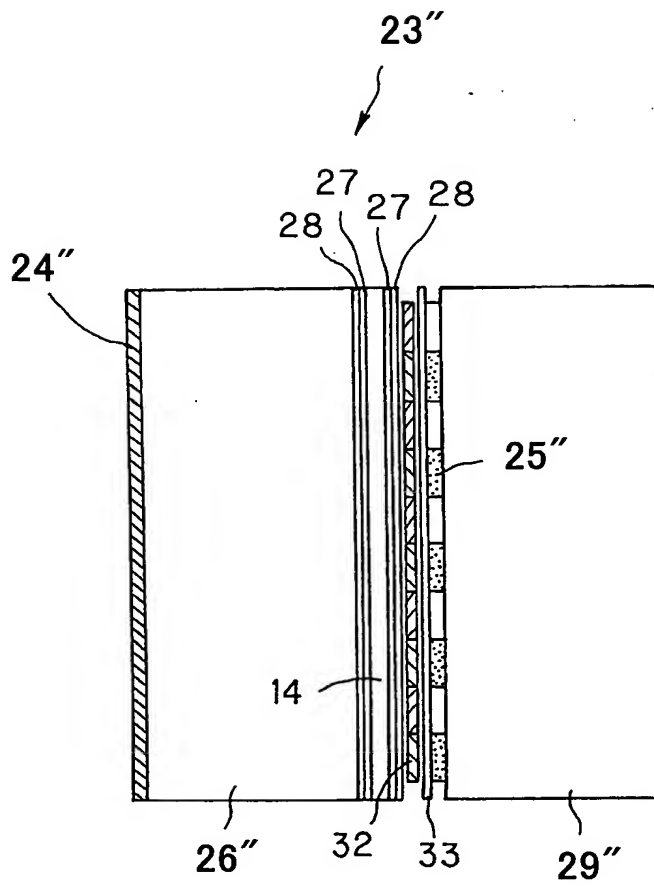





[FIG.20]

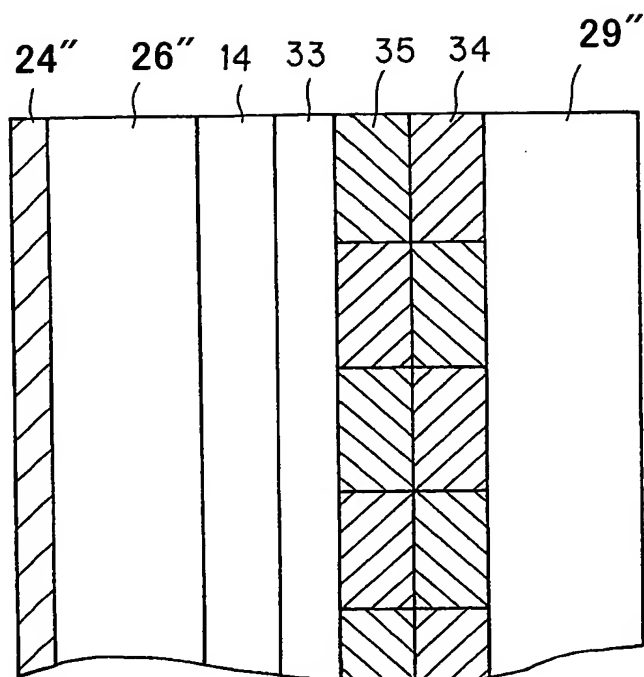







[FIG.21]

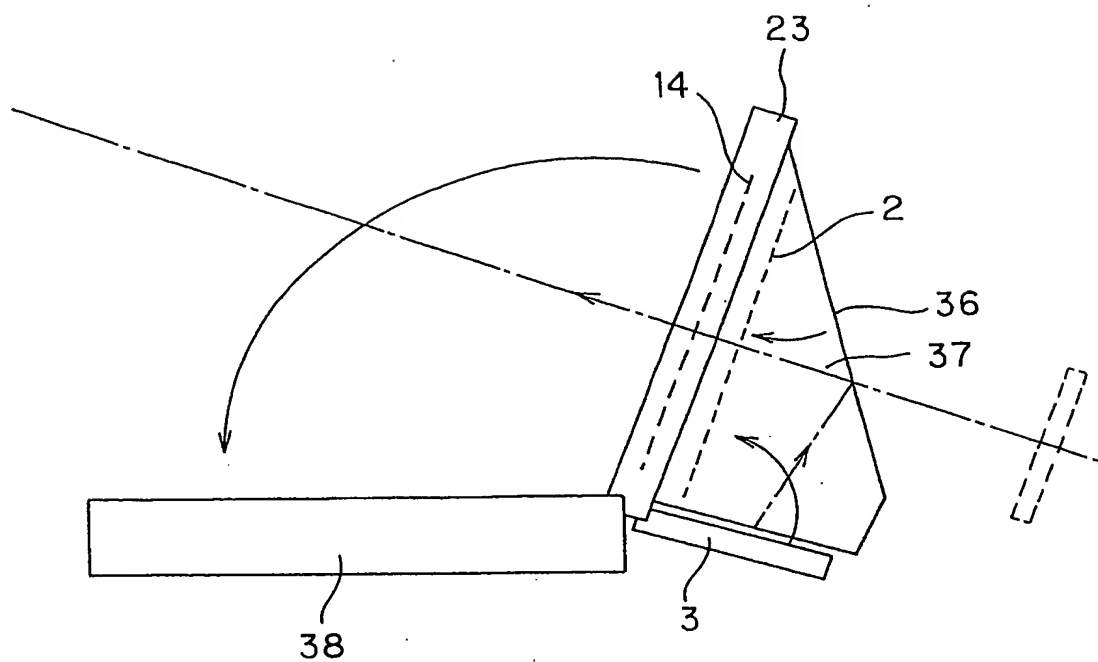


[FIG.22]

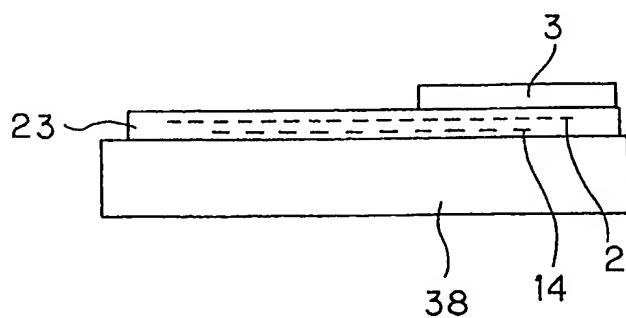


[FIG.23]

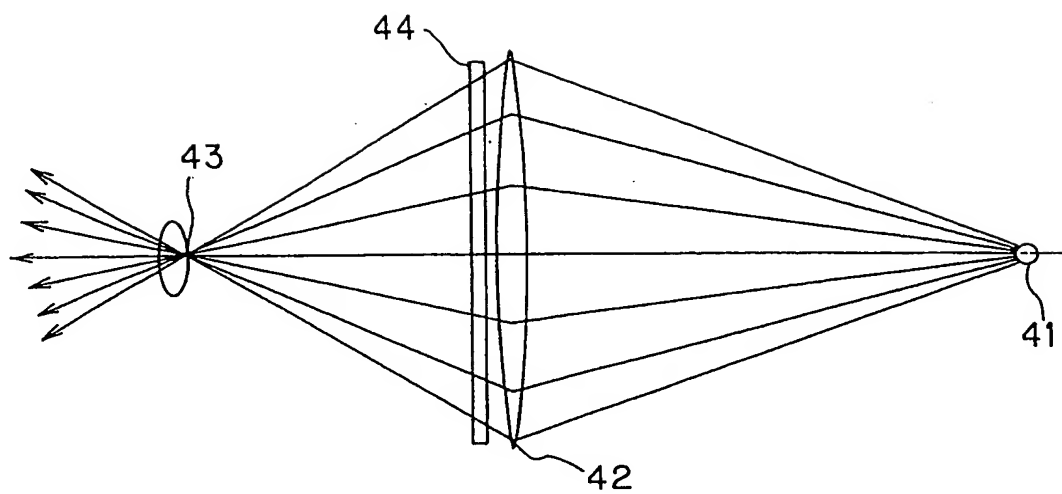


[FIG.24]

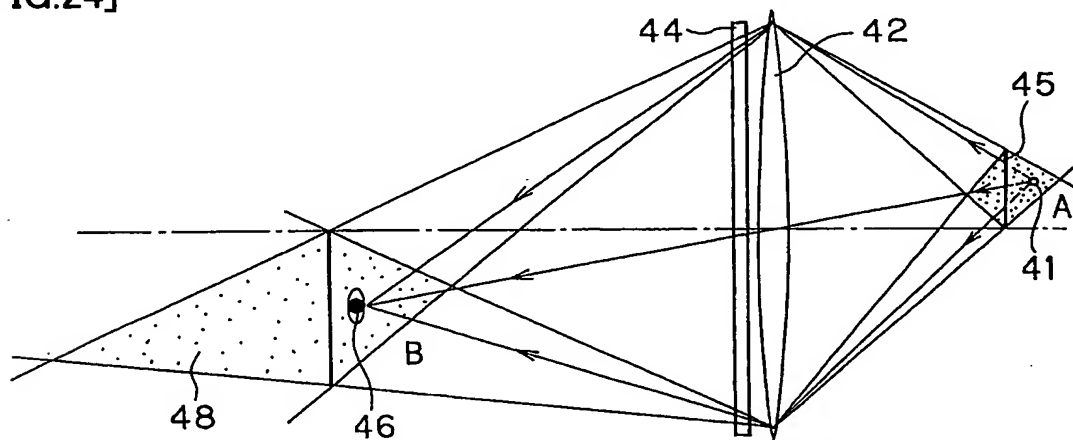


[FIG.25]

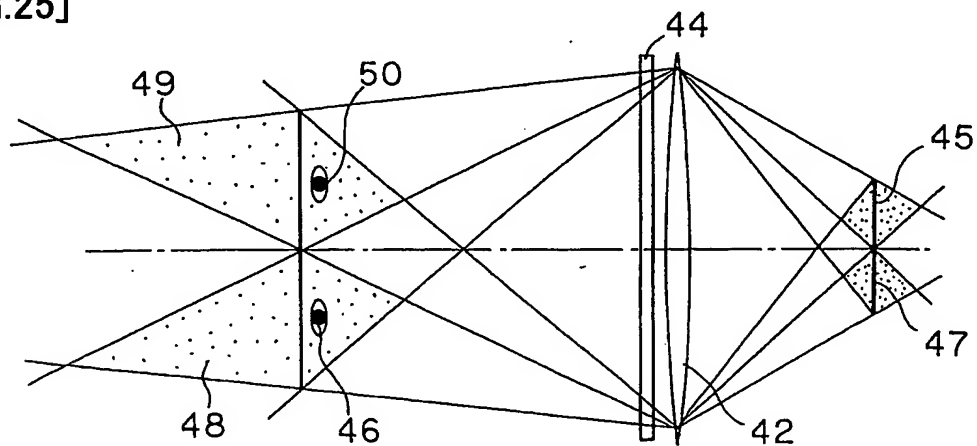


[FIG.26]

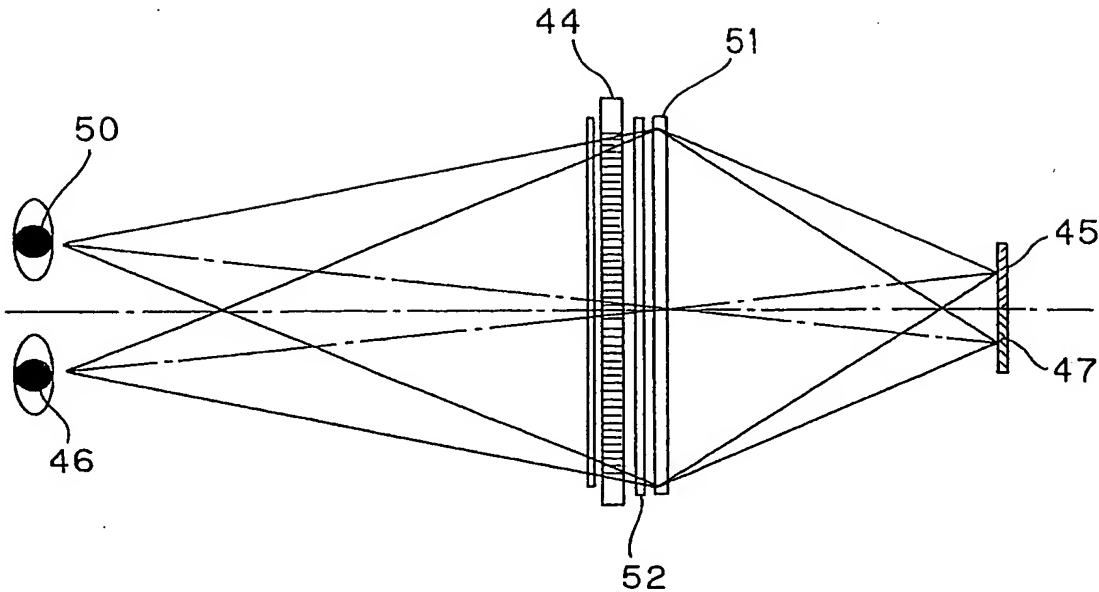


[FIG.27]

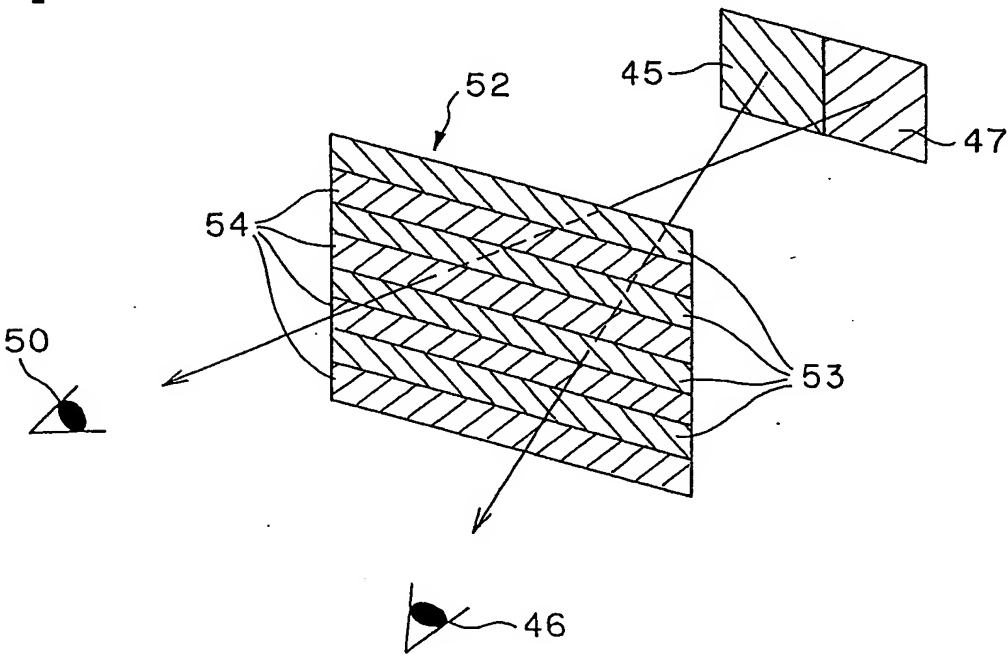



[FIG.28]

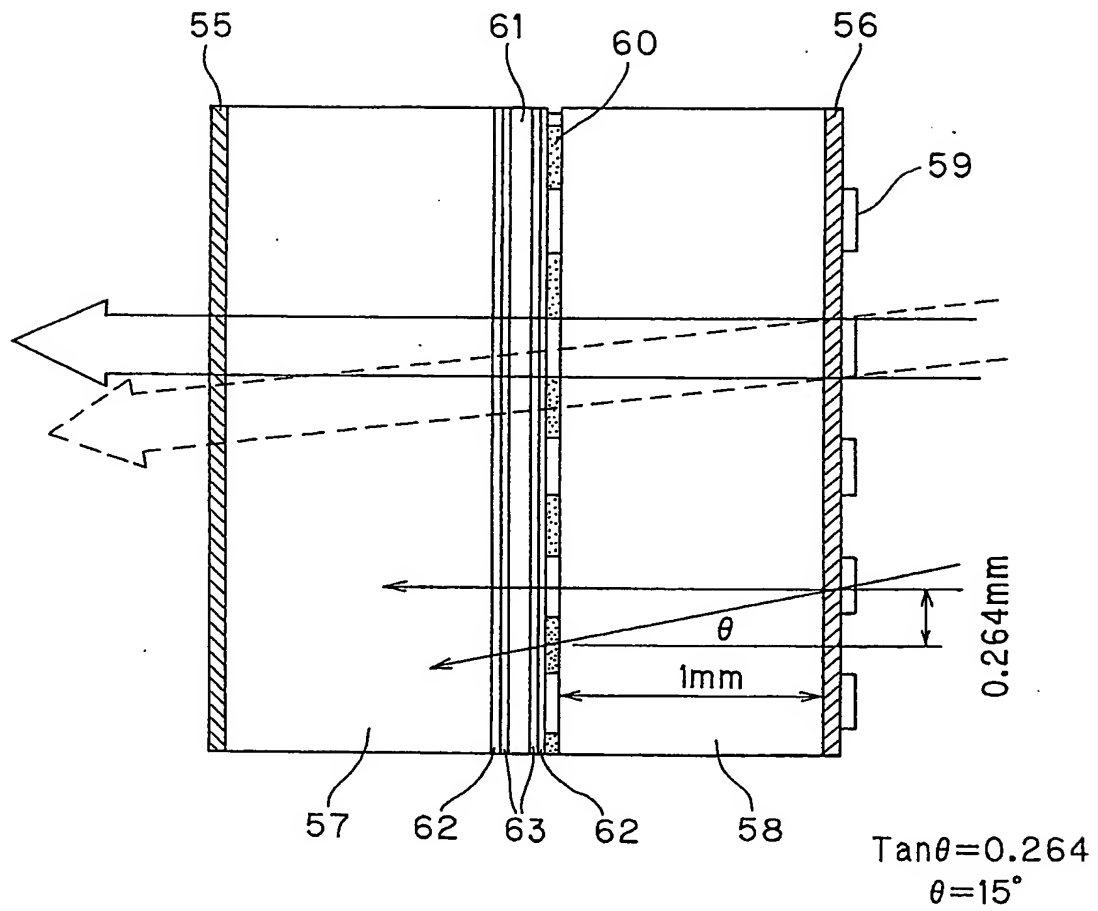

[Document Name]

## ABSTRACT

[Summary]

[Task]

An object of the present invention is to provide a liquid crystal display apparatus in which a stereo image is not impaired and hence a high precision stereo image can be enjoyed even if the viewing position of the viewer is deviated slightly in the vertical and/or left and right directions with respect to the liquid crystal display surface.

[Means for Solution]

A liquid crystal display apparatus includes a liquid crystal display device 1 having a liquid crystal panel 14, a first polarizing filter 15, arranged on the front surface of the liquid crystal panel 14 and a second polarizing filter 16 arranged on the back side of the liquid crystal panel 14. The liquid crystal display apparatus also includes a first light source 3 on the back side of the liquid crystal display device 1, fixedly mounted on left and right sides of a polarizing filter unit for the right eye 4 and a polarizing filter unit for the left eye 5, and an optical means 2 arranged on the back side of the liquid crystal display device 1 for collecting the illuminating light from the first light source 3 for illuminating the so-collected light on the liquid crystal display device 1. The liquid crystal display apparatus also includes a second light source 12 arranged on the front side of the liquid crystal display device 1 for illuminating the light on the head of a viewer 13, and light receiving devices 6 arranged on the front sides of the polarizing filter unit for the right eye 4 and the

polarizing filter unit for the left eye 5 at a preset spacing from the front sides. Moreover, the liquid crystal display apparatus includes a position control unit for processing and comparing the volumes of the received light in the light receiving devices 6 to control the position of the first light source 3 in the left-and-right direction.

• [Selected Drawing] Fig.1

•

### Information of Record for Applicant

Identification Number: [000002185]

1. Date of Change: August 30, 1990

[Reason of Change] Registration

[Address] 7-35, Kitashinagawa 6-chome,  
Shinagawa-ku, Tokyo, Japan

[Name] Sony Corporation